




J e t - L u b e o f C a n a d a L t d .

CONSTRUCTION

Anti-Seize, Sealants and Lubricants

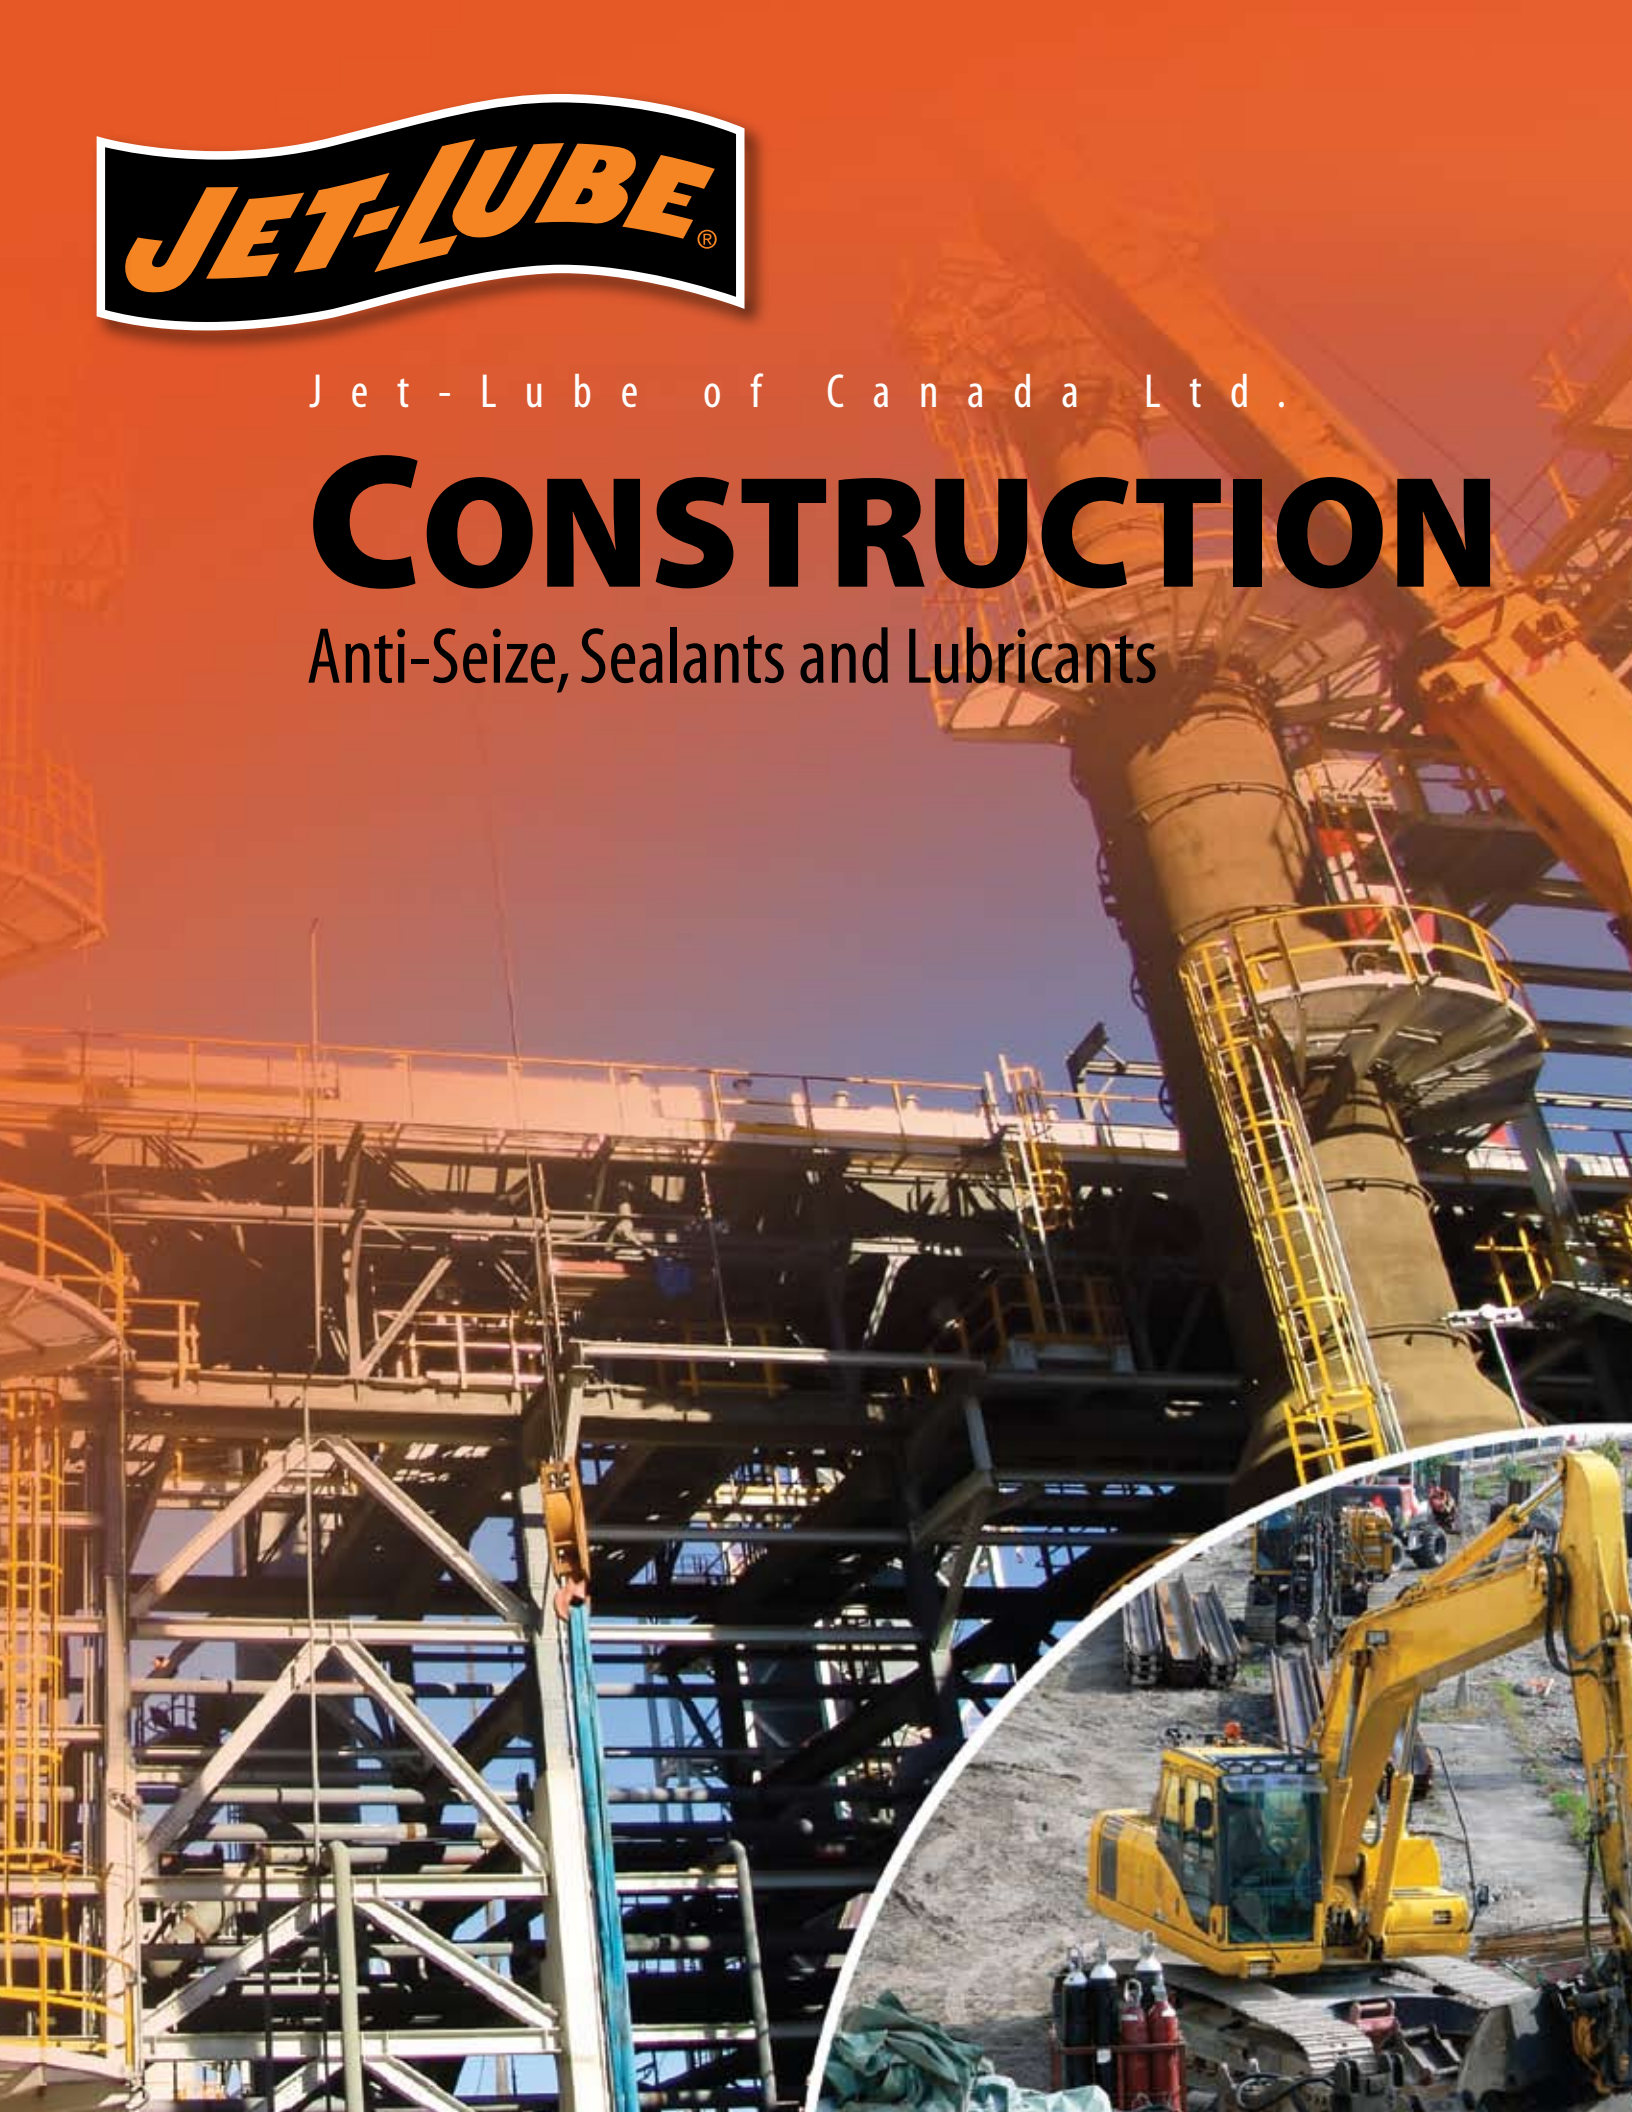



CONSTRUCTION

Anti-Seize, Sealants and Lubricants

Featured Products

12/34 - Lubricant and Penetrant

Alco-EP - Premium Multi-Purpose Grease

Cable-Lube - Wire Rope and Chain Lubricant

EP Bearing Grease - Extreme Pressure Multi-Purpose Grease

Jet-Plex EP - Multi-Purpose Grease

JetPump - Two-Stage Test and Injection Pump

Kopr-Kote HT - High Temperature Anti-Seize

MP-50 - Low Friction Moly Paste

Petro-Tape - PTFE Thread Seal Tape

Rust-Guard - Corrosion Inhibitor

Silicone Compound DM - Moisture Proofing Sealant and Lubricant

Silicone Spray - Industrial Grade Lubricant

Silver Plus Regular - Metallic Anti-Seize

V-2 - Multi-Purpose PTFE Thread Sealant

12/34 Lubricant and Penetrant



Operating Range -75°C to 150°C (-100°F to 300°F)

The foremost penetrating, moisture displacing, lubricating and corrosion preventative available today! Unequaled where salt water, salt spray or other harsh environments are encountered. Provides superior protection and anti-wear properties, penetrates into rusted, corroded and frozen metal parts, which will be easily loosened by means of superior 'creepability', removes moisture, prevents rust and corrosion.

SKU #	Size
37341	340 g aerosol
37343	500 ml trigger spray
37316	4 liter can
37320	20 liter pail
37375	205 liter drum

Alco-EP Premium Multi-Purpose Grease



Operating Range -32°C to 232°C (-25°F to 450°F)

Designed for friction and anti-friction bearings, bushings, chassis points, U-joints, pivot pins and a wide range of other fleet and equipment applications. Provides superior wear protection against extreme pressure and is highly water resistant.

SKU #	Size
37050	14 oz cartridge
37016	35 lb pail
37029	400 lb drum
37055	120 lb keg

CableLube Wire Rope & Chain Lubricant



Operating Range -57°C to 200°C (-70°F to 392°F)

Today's no. 1 wire rope lubricant and penetrant. When being applied, it will flow freely and will penetrate into the core of the wire rope. After being applied, the lube will set and become thicker, which helps it to stay put. As such, it will drastically reduce friction and this reduction in friction reduces micro-pitting and micro-fissions, thus reducing stress and fatigue fractures from forming in the wire rope. The result is a longer cable life, less downtime, less cost and more production.

SKU #	Size
CableLube	
306820	20 liter pail
306875	205 liter drum
Aerosol	
304741	370 g aerosol
CableLube Arctic	
304720	20 liter pail
304775	205 liter drum

EP Bearing Grease™ Extreme Pressure Multi-Purpose Grease



Operating Range -18°C to 165°C (0°F to 325°F)

Specially formulated for use on roller bearings, anti-friction bearings and journals. Is water resistant, highly tenacious and has excellent resistance to the effects of salt spray, heat, water, oxidation, high loads and other adverse conditions common to industrial usage. Will lower maintenance costs and simplify inventory, while providing excellent all-around-performance. Has a multitude of applications in construction where an exceptionally high quality lubricant is required.

SKU #	Size
30350	14 oz cartridge
30316	35 lb pail
30324	120 lb keg

Jet-Plex EP™ Multi-Purpose Grease



Operating Range -18° to 260°C (0°F to 500°F)

Recommended for all types of bearing and sliding applications, for shock-loading, pounding, rough usage and high loads. The ideal multi-purpose grease for use in extreme pressure and high temperature operating conditions. Excellent resistance to water and water washout problems. Even under extreme pressures, oil separation is minimal.

SKU #	Size
31750	14 oz cartridge
31706	5 lb pail
31719	5-US gal pail
31724	120 lb keg

JetPump Two-Stage Test and Injection Pump



Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.

SKU #	Size
JP03	3-US gal
JP05	5-US gal

Kopr-Kote HT High Temperature Anti-Seize



Operating Range -54°C to 815°C (-65° to 1500°F)

When used/applied, Kopr-Kote will protect against seizure, heat-freeze, galling, rust and corrosion. It lowers friction, permits re-use of fittings (thus saving you money on replacement), lowers maintenance costs, is not affected by contraction, expansion or vibration. Recommended for production and maintenance jobs where speed in assembling and dismantling is essential. Has no equal in temperature services up to 815°C (1500°F). **NOTE: not suitable for use with oxygen or LPG Lines.**

SKU #	Size
10250	400 g cartridge
10202	225 ml brush top
10203	450 ml brush top
10204	1 liter jar

MP-50™ Low Friction Moly Paste



Operating Range -25°C to 400°C (-13°F to 750°F)

A product with a multitude of uses. It protects production tools and taps, prevents seizure and freezing of bolts and studs, it reduces torque on makeup and dismantling of any threaded or screwed fitting. Used extensively for lubricating bushings and guideposts on die sets. Also used on assembly and disassembly of press and shrink fits of pins, shafts, bushings, sprockets, gears and bearings. Eliminates galling and distortion. May be applied directly to hot surfaces without running off or dripping.

SKU #	Size
28002	225 ml brush top
28004	1 liter jar
28005	5 liter pail
28010	10 liter pail
28050	400 g cartridge

Petro-Tape PTFE Thread Seal Tape



Operating Range -240°C to 260°C (-400°F to 500°F)

To be used on threaded pipe connections, hydraulic pressure lines, etc. Suitable for use on lines carrying fuels (such as gasoline, diesel fuel, kerosene and aircraft oils), acids and alkalis, solvents and gases (specifications of various mediums available upon request). Because of its characteristics, Petro-Tape is far superior to other PTFE tapes for heavy-duty use. ULC listed for sealing metal threaded pipe connections not exceeding 3".

SKU #	Size
30790	1/2" x 180" roll
30791	3/4" x 180" roll
30792	1" x 180" roll
30793	1/2" x 540" roll
30794	3/4" x 540" roll
30795	1" x 540" roll
30798	1" x 540" metal roll
30800	1/2" x 540" cardboard roll

Rust-Guard™ Corrosion Inhibitor



Operating Range -30°C to 138°C (-20°F to 280°F)

Provides a long-term protection on all metal and alloy surfaces from rust and corrosion for a variety of industrial applications. When applied, it will not crack or flake off and, since it is applied in aerosol or liquid form, it penetrates fully into even the smallest crevices to displace moisture and prevent rust and corrosion.

SKU #	Size
13241	11 oz aerosol
13233	1-US gal can
13235	5-US gal pail
13229	50-US gal drum

Silicone Compound DM™ Moisture Proofing Sealant & Lubricant



Operating Range -57°C to 204°C (-70°F to 400°F)

To be used as a protection against moisture. Because of its low volatility, non-melting thickener and high dielectric strength, it is the ideal compound to protect ignition systems, spark plug connections, electrical assemblies, cable and battery terminals and other similar applications.

SKU #	Size
73560	5-oz tube
73503	450 ml brush-top
73504	1 liter jar
73550	14 oz cartridge
73506	5 lb pail
73522	10 lb pail
73516	35 lb pail
73524	120 lb keg
73529	400 lb drum

Silicone Spray Industrial Grade Lubricant



Operating Range -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is an excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

SKU #	Size
50741	300 g aerosol

Silver Plus Regular Metallic Anti-Seize



Operating Range -129°C to 982°C (-65°F to 1800°F)

Excellent for use on bolts, nuts, gaskets, pipe fittings, guides and slides, valve assemblies, press fits, cylinder heads, chain drives, pump mountings, forging dies, manway studs, exhaust manifold studs, etc. It is the anti-seize of choice for components made of aluminum and its alloys.

SKU #	Size
69902	225 ml brush top
69903	450 ml brush top

V-2™ Multi-Purpose PTFE Thread Sealant



Operating Ranges -56°C to 260°C (-70°F to 500°F)
69000 kPa liquids 14000 kPa gases

A soft setting non-petroleum based sealant designed for use with potable water, liquids and gases where immediate pressurization is desirable or required. May be used on steel, aluminum, brass, copper, iron, reinforced fiberglass, polyethylene, PVC and CPVC. Recommended for threaded pipes carrying air, CO₂, diesel fuel, H₂S, inert gases, refrigerants, etc. (specifications of all mediums available upon request). Pressures to 10,000 PSI for liquids and 2,000 PSI for gases.

SKU #	Size
22002	225 ml brush top
22004	1 liter jar
22005	5 liter pail
22010	10 liter pail
22055	55 liter keg

Jet-Lube products listed alphabetically

12/34	Ezy-Open	Jet-Plex EP	O	T
202 Moly-Lith	Ezy-Pak 100	JetPump	OG-H	Temp-Guard
550	Ezy-Pak 115		Oven Chain Lubricant 	TF-15
769	Ezy-Pak 120	K		TF-500
A	Ezy-Pak 125	Kiln Grease	P	TFW
Alco EP	Ezy-Turn 2	Kollar King	Petro-Tape	Top Gun
Alco-EP ECF 	Ezy-Turn 3	Kopr-Kote	PFPE Grease	Tuff E Nuff
Alco-EP 73 Plus	Ezy-Turn 3 Arctic	Korr-Guard	Pitless Adapter Lube 	U
AP-1 White	Ezy-Turn 4	Kovr-Kote	Plumber's Pal	Ultra
AP-5	Ezy-Turn 5		Powr-Kote	
API-Modified Arctic	Ezy-Turn 6	L	PS Terminal	
API-Modified	Ezy-Turn 8	Lapping Oil		V
Arctic Grease	Ezy-Turn 12	LBX -Special	R	V-2
AX-2	Ezy-Turn 14	Lite Knight	RD-N	
	Ezy-Turn 22		RD-P	W
	Ezy-Turn Body Fill	M	Renew	Well-Guard 
B	Ezy-Turn H ₂ S	Magic Wrench 	Riser Bolt Lube	White Knight 
Bullseye 	Ezy-Turn Polar	Marine Kopr	Rubber Lubricant/Mold Release	White Lithium
	Ezy-Turn PVS	Marine Moly	RuFF 9	Wire Line Lubricant ECF 
C		Marine MP	RuFF 21	WLD
CableLube	F	Marine Wire Rope & Hawser Grease	Run-N-Seal	WRL
CB-2	FMG 	Moly-Arc	Run-N-Seal ECF 	Z
CC-Lube 	Food Grade Silicone 	Moly-Mist	Rust Guard	Z-50
Clean-Up		Moly Petrolatum		Z-Plate Aerosol
Clean-Up Plus	G	Moly-Arc	S	Zinc Petrolatum
Creeper-Lube	Gear-Guard	MotherCutter 	Seal Guard	
	Graphite Petrolatum	MP-50	Seal-Guard ECF 	
E			Sheen Free 	
Easy-Clean	J	N	Silicone Compound DM	
Easy-Clean Liquid	J-75	NCS-30	Silicone Spray	
ECF Anti-Seize 	J-89	NCS-30 ECF 	Silver Plus	
Eco-Safe 	JL-5000 	Nikal	SS-30	
EMS 	Jacking System Grease ECF 	Nikal Nuclear		
Enviro-Guard 	Jet-Lok PS-50	No. 33		
Enviro-Safe	Jet-Lok PS-67	No. 60		
EP Bearing Grease	Jet-Lok TL-72	Nuclear Nonmetallic		
Extreme	Jet-Lube 21			



Qualifying products will bear the thumbprint.

www.jetlubecanada.com



Jet-Lube of Canada Ltd. was established in Edmonton, Alberta in 1954 to take advantage of the oil boom ushered in by Leduc oil discovery and to serve the surge of the new Oil Patch. The first products manufactured were primarily thread compounds designed for the drilling and production industries. By focusing on product quality and reliability, Jet-Lube soon became a dominant force in the niche industry of oilfield thread compounds.

In the mid 1970's the product line was diversified to include MRO (Maintenance, Repair, Overhaul) products such as anti-seize compounds, thread sealants, greases and lubricants, cleaners and degreasers, etc. – products that virtually every industry uses in some part of their operations. The same care and attention to quality has quickly brought us to the fore as a world leader in the manufacture of thread compounds and specialty lubricants. New products are constantly being developed to address new technology and environmental concerns.

Since the late 1980s, Jet-Lube has led the way in the development of environmentally-acceptable lubricants, sealants and related specialty products. After years of reformulation and testing, Jet-Lube now offers industries around the world a complete line of environmentally acceptable products that exceed industry standards and meet Jet-Lube's own high-performance criteria. Qualifying products bear our "Eco-Certified" thumbprint.

In 1995 Jet-Lube was one of the first manufacturing companies in Canada to receive the ISO 9000 series certification and in 2008 upgraded to the 9001:2008 standard.

Over the past decade warehouse facilities have been added across Canada to better serve our customers from coast to coast. While Jet-Lube of Canada Ltd. continues to be inspired by the potential for further growth, the prime commitment will always be to customer satisfaction.

We are always happy for the opportunity to talk to our customers and potential customers about our products and about specific applications. If we don't have a product on the shelf that will help, ask us about developing or modifying a product specifically for your application. Solving problems is what helps us grow!





CONTACT US

Head Office

3820-97 Street NW
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449
Fax: (780) 463-7454

sales@jetlubecanada.com
www.jetlubecanada.com

Vice President & General Manager
Gary McCormick
garym@jetlubecanada.com

National Sales & Marketing Manager:
Jim McLaws
jdm@jetlubecanada.com

Technical Service:
Neil Ruel
neilr@jetlubecanada.com

Inside Sales:
Maleena Carreiro
maleenab@jetlubecanada.com



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.

