




J e t - L u b e o f C a n a d a L t d .

# HVAC - PLUMBING & HEATING

Anti-Seize, Sealants and Lubricants

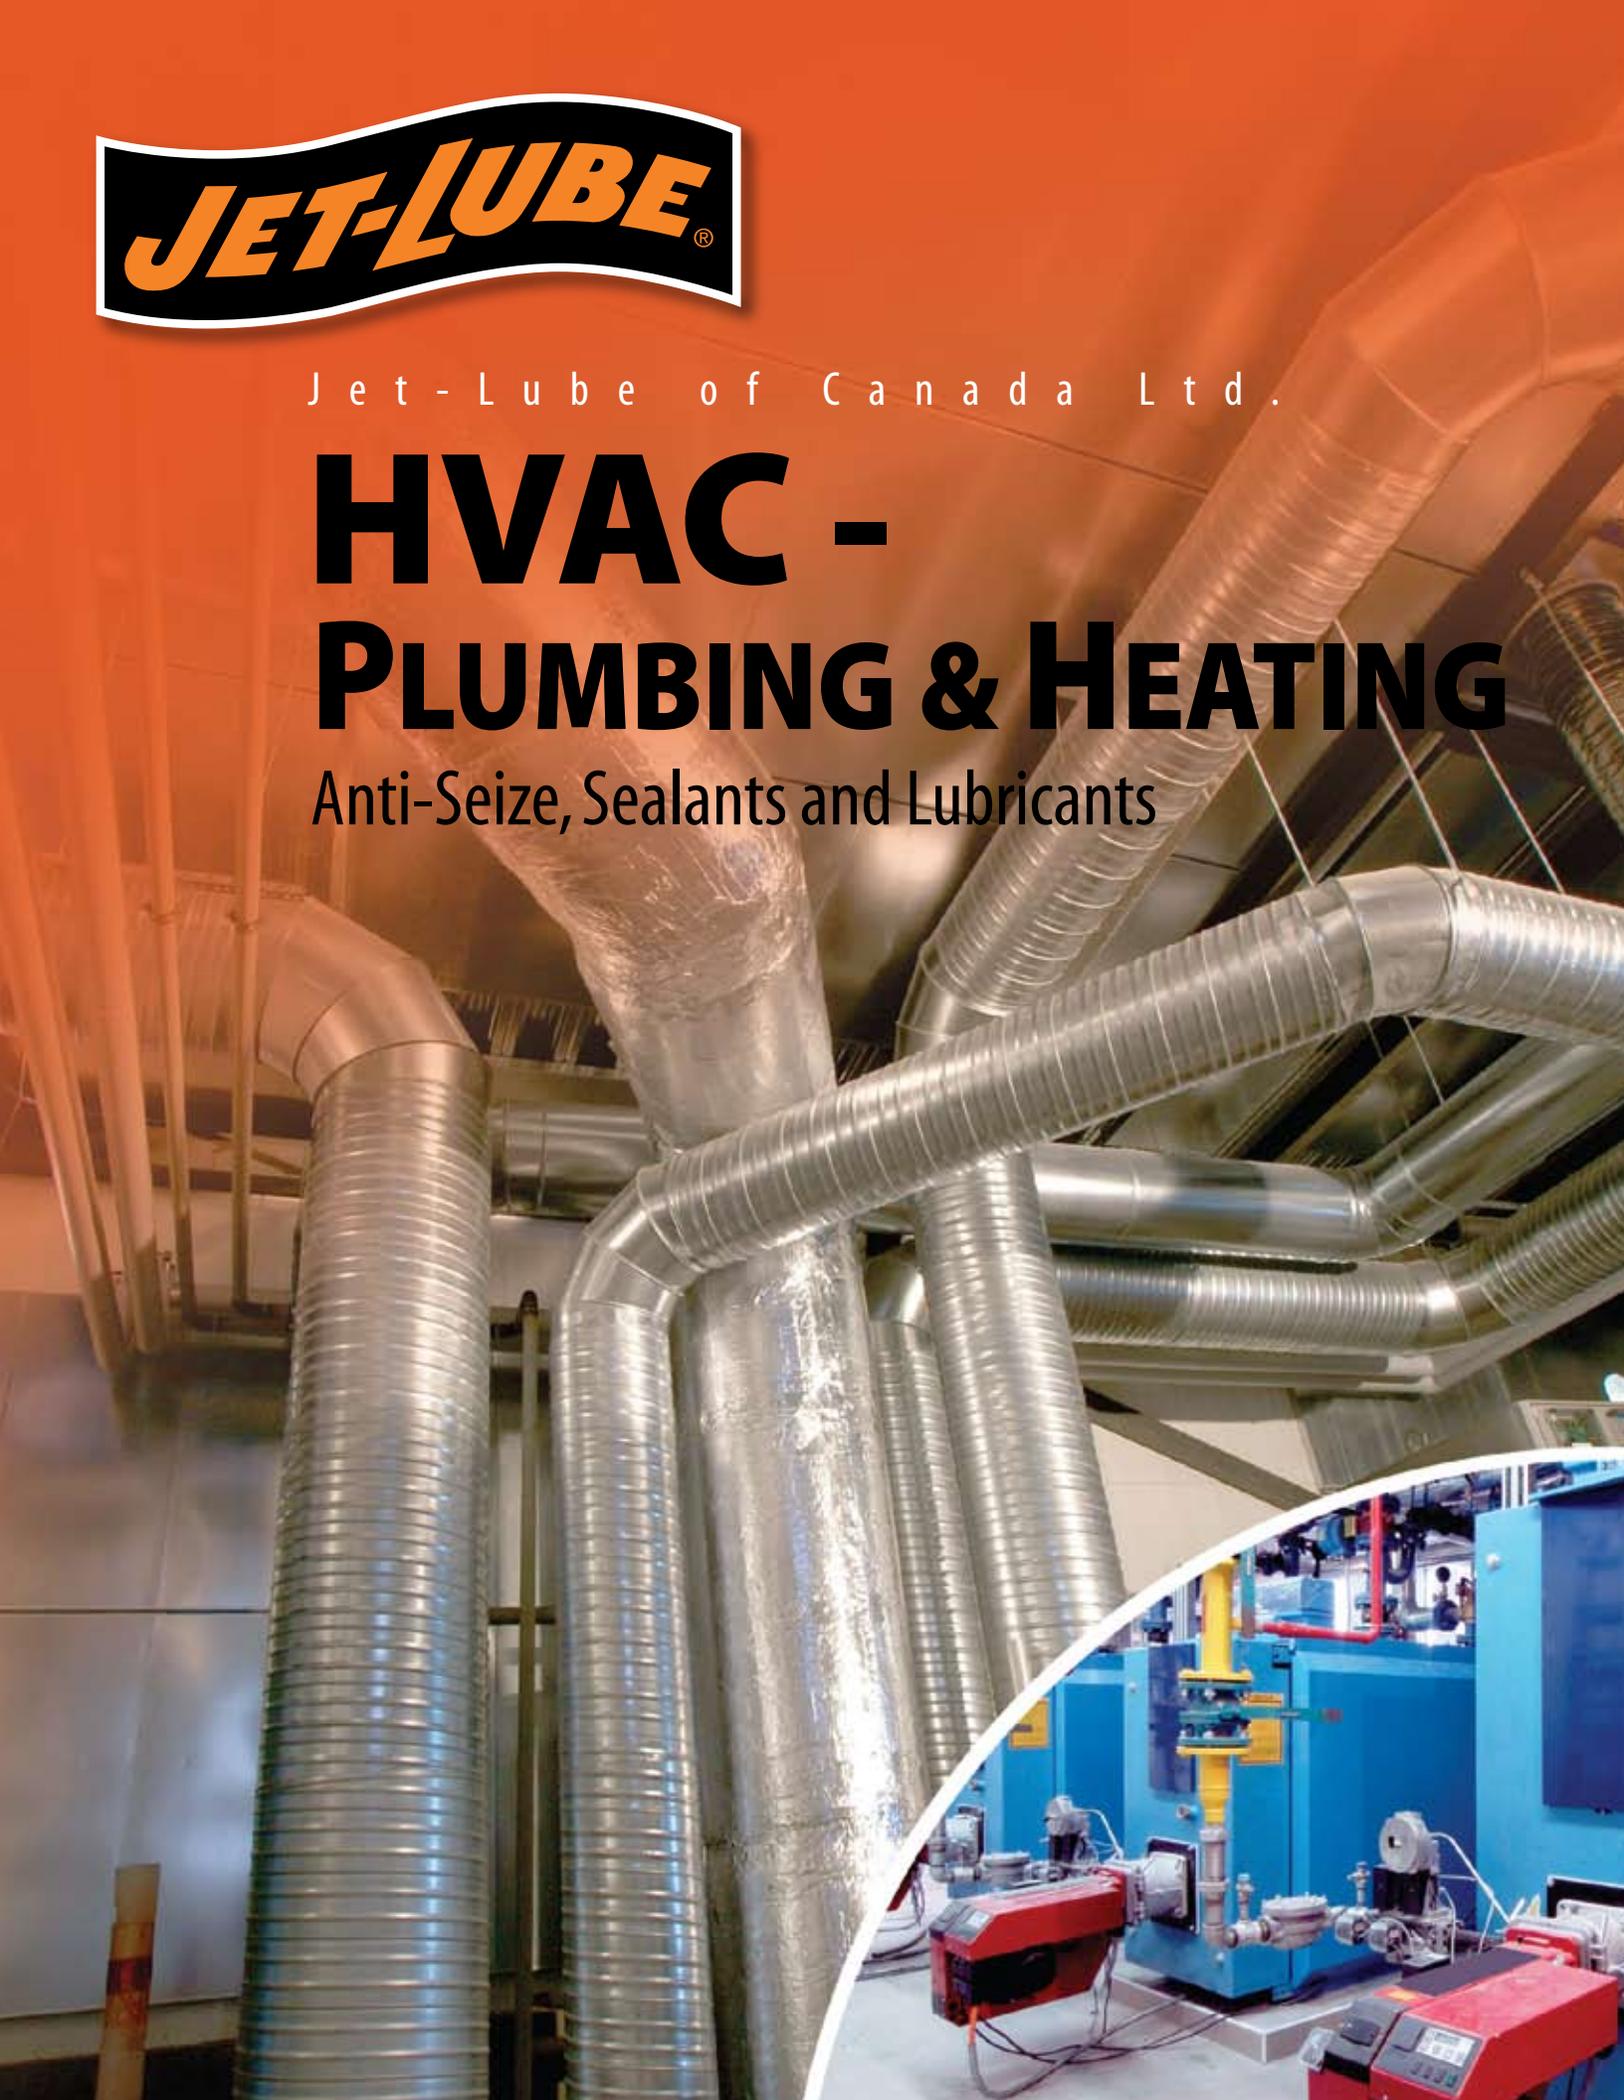



# HVAC-PLUMBING & HEATING

Anti-Seize, Sealants and Lubricants

## Featured Products

**12/34** - Lubricant, Penetrant and Coating

**Jet-Lok PS-50** - Anaerobic Thread Sealant

**Jet-Lok PS-67** - PTFE Filled Anaerobic Thread Sealant

**Jet-Lok TL-72** - High Temperature Thread Locker

**JetPump** - Two Stage Hydro-Testing Pump

**Kopr-Kote HT** - High Temperature Anti-Seize

**MotherCutter WB** - Water Based Biodegradable Cutting Fluid

**Nikal** - High Temperature Anti-Seize

**Petro-Tape** - PTFE Thread Seal Tape

**Silicone Spray** - Industrial Grade Lubricant

**TF-15** - Thread Sealing Compound

**TFW** - Multi-Purpose Thread Sealant with PTFE

**V-2** - Multi-Purpose PTFE Thread Sealant

**Z-Plate** - Zinc-Rich Galvanize

## 12/34 Lubricant and Penetrant



Operating Range -75°C to 150°C (-100°F to 300°F)

The foremost penetrating, moisture displacing, lubricating and corrosion preventative available today! Unequaled where salt water, salt spray or other harsh environments are encountered. Provides superior protection and anti-wear properties, penetrates into rusted, corroded and frozen metal parts, which will be easily loosened by means of superior 'creepability', removes moisture - prevents rust and corrosion.

SKU #	Size
37341	340 g aerosol
37343	500 ml trigger spray
37316	4 liter can
37320	20 liter pail
37375	205 liter drum

## Jet-Lok® PS-50 Anaerobic Thread Sealant



Operating Range -54°C to 65°C (-65°F to 180°F)

A medium strength, high performance sealant designed for the locking and sealing of metal threaded pipes and fittings. Ideal sealing against gases, water, LPG, hydrocarbons, oils and other chemicals. Also suitable for stainless steel surfaces without the need for surface activation. Designed as well for coarse threads.

SKU #	Size
57766	150 ml tube
57765	225 ml tube

## Jet-Lok® PS-67 PTFE filled Anaerobic Thread Sealant



Operating Range -54°C to 204°C (-65°F to 400°F)

A highly shock and vibration resistant sealant, typically used for sealing piping systems carrying gases, water, LPG, hydrocarbons, oils, gasoline and other chemicals. Extensively used on pressure vessels, air compressors, hydraulic systems, tanks, etc. **NOT recommended for use in pure oxygen and/or oxygen rich systems. Should NOT be selected as a sealant for chlorine or other strong oxidizing materials.**

SKU #	Size
57666	50 ml tube
57667	225 ml tube

## Jet-Lok® TL-72 High-Temperature Thread Locking Compound



Operating Range -55°C to 204°C (-65°F to 400°F)

To be used for high-temperature locking and sealing of studs, nuts, screws, bolts and fittings against leakage, contamination and corrosion. Recommended for parts that do not require routine maintenance. More suitable for larger diameter, coarse threaded parts, because of its viscosity.

SKU #	Size
55566	50 ml tube
55565	225 ml tube

## JetPump Two-Stage Test and Injection Pump



Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.

SKU #	Size
JP03	3-US gal
JP05	5-US gal

## Kopr-Kote HT High Temperature Anti-Seize



**Operating Range** -54°C to 815°C (-65° to 1500°F)

When used/applied, Kopr-Kote will protect against seizure, heat-freeze, galling, rust and corrosion. It lowers friction, permits re-use of fittings (thus saving you money on replacement), lowers maintenance costs and is not affected by contraction, expansion or vibration. Recommended for production and maintenance jobs where speed in assembling and dismantling is essential. **NOTE: not suitable for use with oxygen or LPG Lines.**

SKU #	Size
10250	400 g cartridge
10202	225 ml brush top
10203	450 ml brush top
10204	1 liter jar

## MotherCutter WB Water Based Biodegradable Cutting Fluid



**Operating Range** -5°C to 85°C (23°F to 185°F)

An Eco-Certified, biodegradable water based cutting fluid designed for a wide range of machine shop applications for both ferrous and non-ferrous metals. Will help to improve your tool life, reduce downtime, reduce HAZMAT disposal costs, and increase your scrap value as it is now "oil free" and ready for pickup. It is the ideal product for light-duty machining and small CNC machines. Recommended at full strength for flooding applications, metalworking involving drilling, sawing, broaching, milling, tapping, threading reaming, drawing, facing, grinding or field machining applications such as pipe cutting and beveling.

SKU #	Size
184316	4 liter jug
184320	20 liter pail

## Nikal® Pure Nickel Extreme Temperature Anti-Seize



**Operating Range** -54°C to 1427°C (-65°F to 2600°F)

Premium quality anti-seize and gasket compound, ideal for use in extreme temperatures and hostile environments. Can be applied on items, such as burner tips, manifolds, pipe fittings, furnace hinges, heat exchangers, manhole studs. May be safely used with ammonia, acetylene and vinyl monomers, which are unstable in the presence of copper. Contains no graphite, which is an additional benefit on stainless steel applications. **Note: Not for use on oxygen or LPG lines !**

SKU #	Size
13602	225 ml brush top
13604	1 liter jar
13605	5 liter pail
13615	15 liter pail
13655	55 liter drum

## Petro-Tape PTFE Thread Seal Tape



**Operating Range** -240°C to 260°C (-400°F to 500°F)

To be used on threaded pipe connections, hydraulic pressure lines, etc. Suitable for use on lines carrying fuels (such as gasoline, diesel fuel, kerosene and aircraft oils), acids and alkalis, solvents and gases (specifications of various mediums available upon request). Because of its characteristics, Petro-Tape is far superior to other PTFE tapes for heavy-duty use. ULC Listed: for sealing metal threaded pipe connections not exceeding 3" at the following pressure: natural gas and methane, gasoline, petroleum oils, propane and butane: 2,000 Psi (13,800 kPa)

SKU #	Size
30790	1/2" x 180" roll
30791	3/4" x 180" roll
30792	1" x 180" roll
30793	1/2" x 540" roll
30794	3/4" x 540" roll
30795	1" x 540" roll
30798	1" x 540" metal roll
30800	1/2" x 540" cardboard roll

## Silicone Spray Industrial Grade Lubricant



**Operating Range** -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

SKU #	Size
50741	300 g aerosol

## TF-15 Thread Sealing Compound



**Operating Range** -23°C to 315°C (-10°F to 600°F)

Excellent for use on all threads subject to vibration, surge, pressure and temperature fluctuations. Particularly useful in areas subject to H<sub>2</sub>S and salt water. Recommended for lines carrying a wide variety of oils, solvents, gases (**except oxygen**), acids, alkalis and steam. Prevents galling and thread wear, seals badly worn threads and greatly increases connection life. Seals at temperatures to 315°C and pressures to 10,000 PSI.

SKU #	Size
23002	225 ml brush top
23067	250 ml tube
23004	1 liter jar
23005	5 liter pail
23010	10 liter pail
23015	15 liter pail

## TFW™ Multi-Purpose Thread Sealant with PTFE



**Operating Range** -18°C to 260°C (0°F to 500°F)

May be used on steel, aluminum, brass, copper, iron, reinforced fiberglass, PVC, CPVC and ABS threaded connections. Specifically formulated to seal threaded connections against leakage due to internal pressure. Recommended for threaded pipe carrying air, ammonia, freons, heating oils, LPG, steam, water, etc. Is listed under the Uniform Plumbing Code (UPC), File No. 1282. **Note: NOT for use on oxygen lines!**

SKU #	Size
24002	1/2 pint brush top
24004	1 pint brush top
24023	1-US gal pail
24015	5-US gal pail

## V-2™ Multi-Purpose PTFE Thread Sealant



**Operating Range** -56°C to 260°C (-70°F to 500°F)  
69000 kPa liquids 14000 kPa gases

A soft setting non-petroleum based sealant designed for use with potable water, liquids and gases where immediate pressurization is desirable or required. May be used on steel, aluminium, brass, copper, iron, reinforced fiberglass, polyethylene, PVC and CPVC. Recommended for threaded pipes carrying air, CO<sub>2</sub>, diesel fuel, H<sub>2</sub>S, inert gases, refrigerants, etc., (specifications of all mediums available upon request). Pressures to 10,000 Psi for liquids and 2,000 Psi for gases. NSF registered (P1).

SKU #	Size
22002	225 ml brush top
22004	1 liter jar
22005	5 liter pail
22010	10 liter pail
22055	55 liter keg

## Z-Plate™ Zinc-Rich Galvanize



**Operating Range** -185°C to 400°C (-300°F to 750°F)

Excellent product for cosmetic repairs of welded joints, storage tanks, pipelines, heat ducts, etc. Provides the protection of hot-dip galvanizing plus the convenience of on-the-job aerosol application. Protects against rust, rust spreading and corrosion.

SKU #	Size
60541	340 g aerosol

## Jet-Lube products listed alphabetically

12/34

202 Moly-Lith

550

769

### A

Alco EP

Alco-EP ECF 

Alco-EP 73 Plus

AP-1 White

AP-5

API-Modified Arctic

API-Modified

Arctic Grease

AX-2

### B

Bullseye 

### C

CableLube

CB-2

CC-Lube 

Clean-Up

Clean-Up Plus

Creeper-Lube

### E

Easy-Clean

Easy-Clean Liquid

ECF Anti-Seize 

Eco-Safe 

EMS 

Enviro-Guard 

Enviro-Safe

EP Bearing Grease

Extreme

Ezy-Open

Ezy-Pak 100

Ezy-Pak 115

Ezy-Pak 120

Ezy-Pak 125

Ezy-Turn 2

Ezy-Turn 3

Ezy-Turn 3 Arctic

Ezy-Turn 4

Ezy-Turn 5

Ezy-Turn 6

Ezy-Turn 8

Ezy-Turn 12

Ezy-Turn 14

Ezy-Turn 22

Ezy-Turn Body Fill

Ezy-Turn H<sub>2</sub>S

Ezy-Turn Polar

Ezy-Turn PVS

### F

FMG 

Food Grade Silicone 

### G

Gear-Guard

Graphite Petrolatum

### J

J-75

J-89

JL-5000 

Jacking System Grease ECF 

Jet-Lok PS-50

Jet-Lok PS-67

Jet-Lok TL-72

Jet-Lube 21

Jet-Plex EP

JetPump

### K

Kiln Grease

Kollar King

Kopr-Kote

Korr-Guard

Kovr-Kote

### L

Lapping Oil

LBX -Special

Lite Knight

### M

Magic Wrench 

Marine Kopr

Marine Moly

Marine MP

Marine Wire Rope & Hawser Grease

Moly-Arc

Moly-Mist

Moly Petrolatum

Moly-Arc

MotherCutter 

MP-50

### N

NCS-30

NCS-30 ECF 

Nikal

Nikal Nuclear

No. 33

No. 60

Nuclear Nonmetallic

### O

OG-H

Oven Chain Lubricant 

### P

Petro-Tape

PFPE Grease

Pitless Adapter Lube 

Plumber's Pal

Powr-Kote

PS Terminal

### R

RD-N

RD-P

Renew

Riser Bolt Lube

Rubber Lubricant/Mold Release

RuFF 9

RuFF 21

Run-N-Seal

Run-N-Seal ECF 

Rust Guard

### S

Seal Guard

Seal-Guard ECF 

Sheen Free 

Silicone Compound DM

Silicone Spray

Silver Plus

SS-30

### T

Temp-Guard

TF-15

TF-500

TFW

Top Gun

Tuff E Nuff

### U

Ultra

### V

V-2

### W

Well-Guard 

White Knight 

White Lithium

Wire Line Lubricant ECF 

WLD

WRL

### Z

Z-50

Z-Plate Aerosol

Zinc Petrolatum



Qualifying products will bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)



Jet-Lube of Canada Ltd. was established in Edmonton, Alberta in 1954 to take advantage of the oil boom ushered in by Leduc oil discovery and to serve the surge of the new Oil Patch. The first products manufactured were primarily thread compounds designed for the drilling and production industries. By focusing on product quality and reliability, Jet-Lube soon became a dominant force in the niche industry of oilfield thread compounds.

In the mid 1970's the product line was diversified to include MRO (Maintenance, Repair, Overhaul) products such as anti-seize compounds, thread sealants, greases and lubricants, cleaners and degreasers, etc. – products that virtually every industry uses in some part of their operations. The same care and attention to quality has quickly brought us to the fore as a world leader in the manufacture of thread compounds and specialty lubricants. New products are constantly being developed to address new technology and environmental concerns.

Since the late 1980s, Jet-Lube has led the way in the development of environmentally-acceptable lubricants, sealants and related specialty products. After years of reformulation and testing, Jet-Lube now offers industries around the world a complete line of environmentally acceptable products that exceed industry standards and meet Jet-Lube's own high-performance criteria. Qualifying products bear our "Eco-Certified" thumbprint.

In 1995 Jet-Lube was one of the first manufacturing companies in Canada to receive the ISO 9000 series certification and in 2008 upgraded to the 9001:2008 standard.

Over the past decade warehouse facilities have been added across Canada to better serve our customers from coast to coast. While Jet-Lube of Canada Ltd. continues to be inspired by the potential for further growth, the prime commitment will always be to customer satisfaction.

We are always happy for the opportunity to talk to our customers and potential customers about our products and about specific applications. If we don't have a product on the shelf that will help, ask us about developing or modifying a product specifically for your application. Solving problems is what helps us grow!





## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

Vice President & General Manager  
Gary McCormick  
[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

National Sales & Marketing Manager:  
Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

Technical Service:  
Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

Inside Sales:  
Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube ofCanada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.