




J e t - L u b e o f C a n a d a L t d .

MANUFACTURING & MRO

Anti-Seize, Sealants and Lubricants

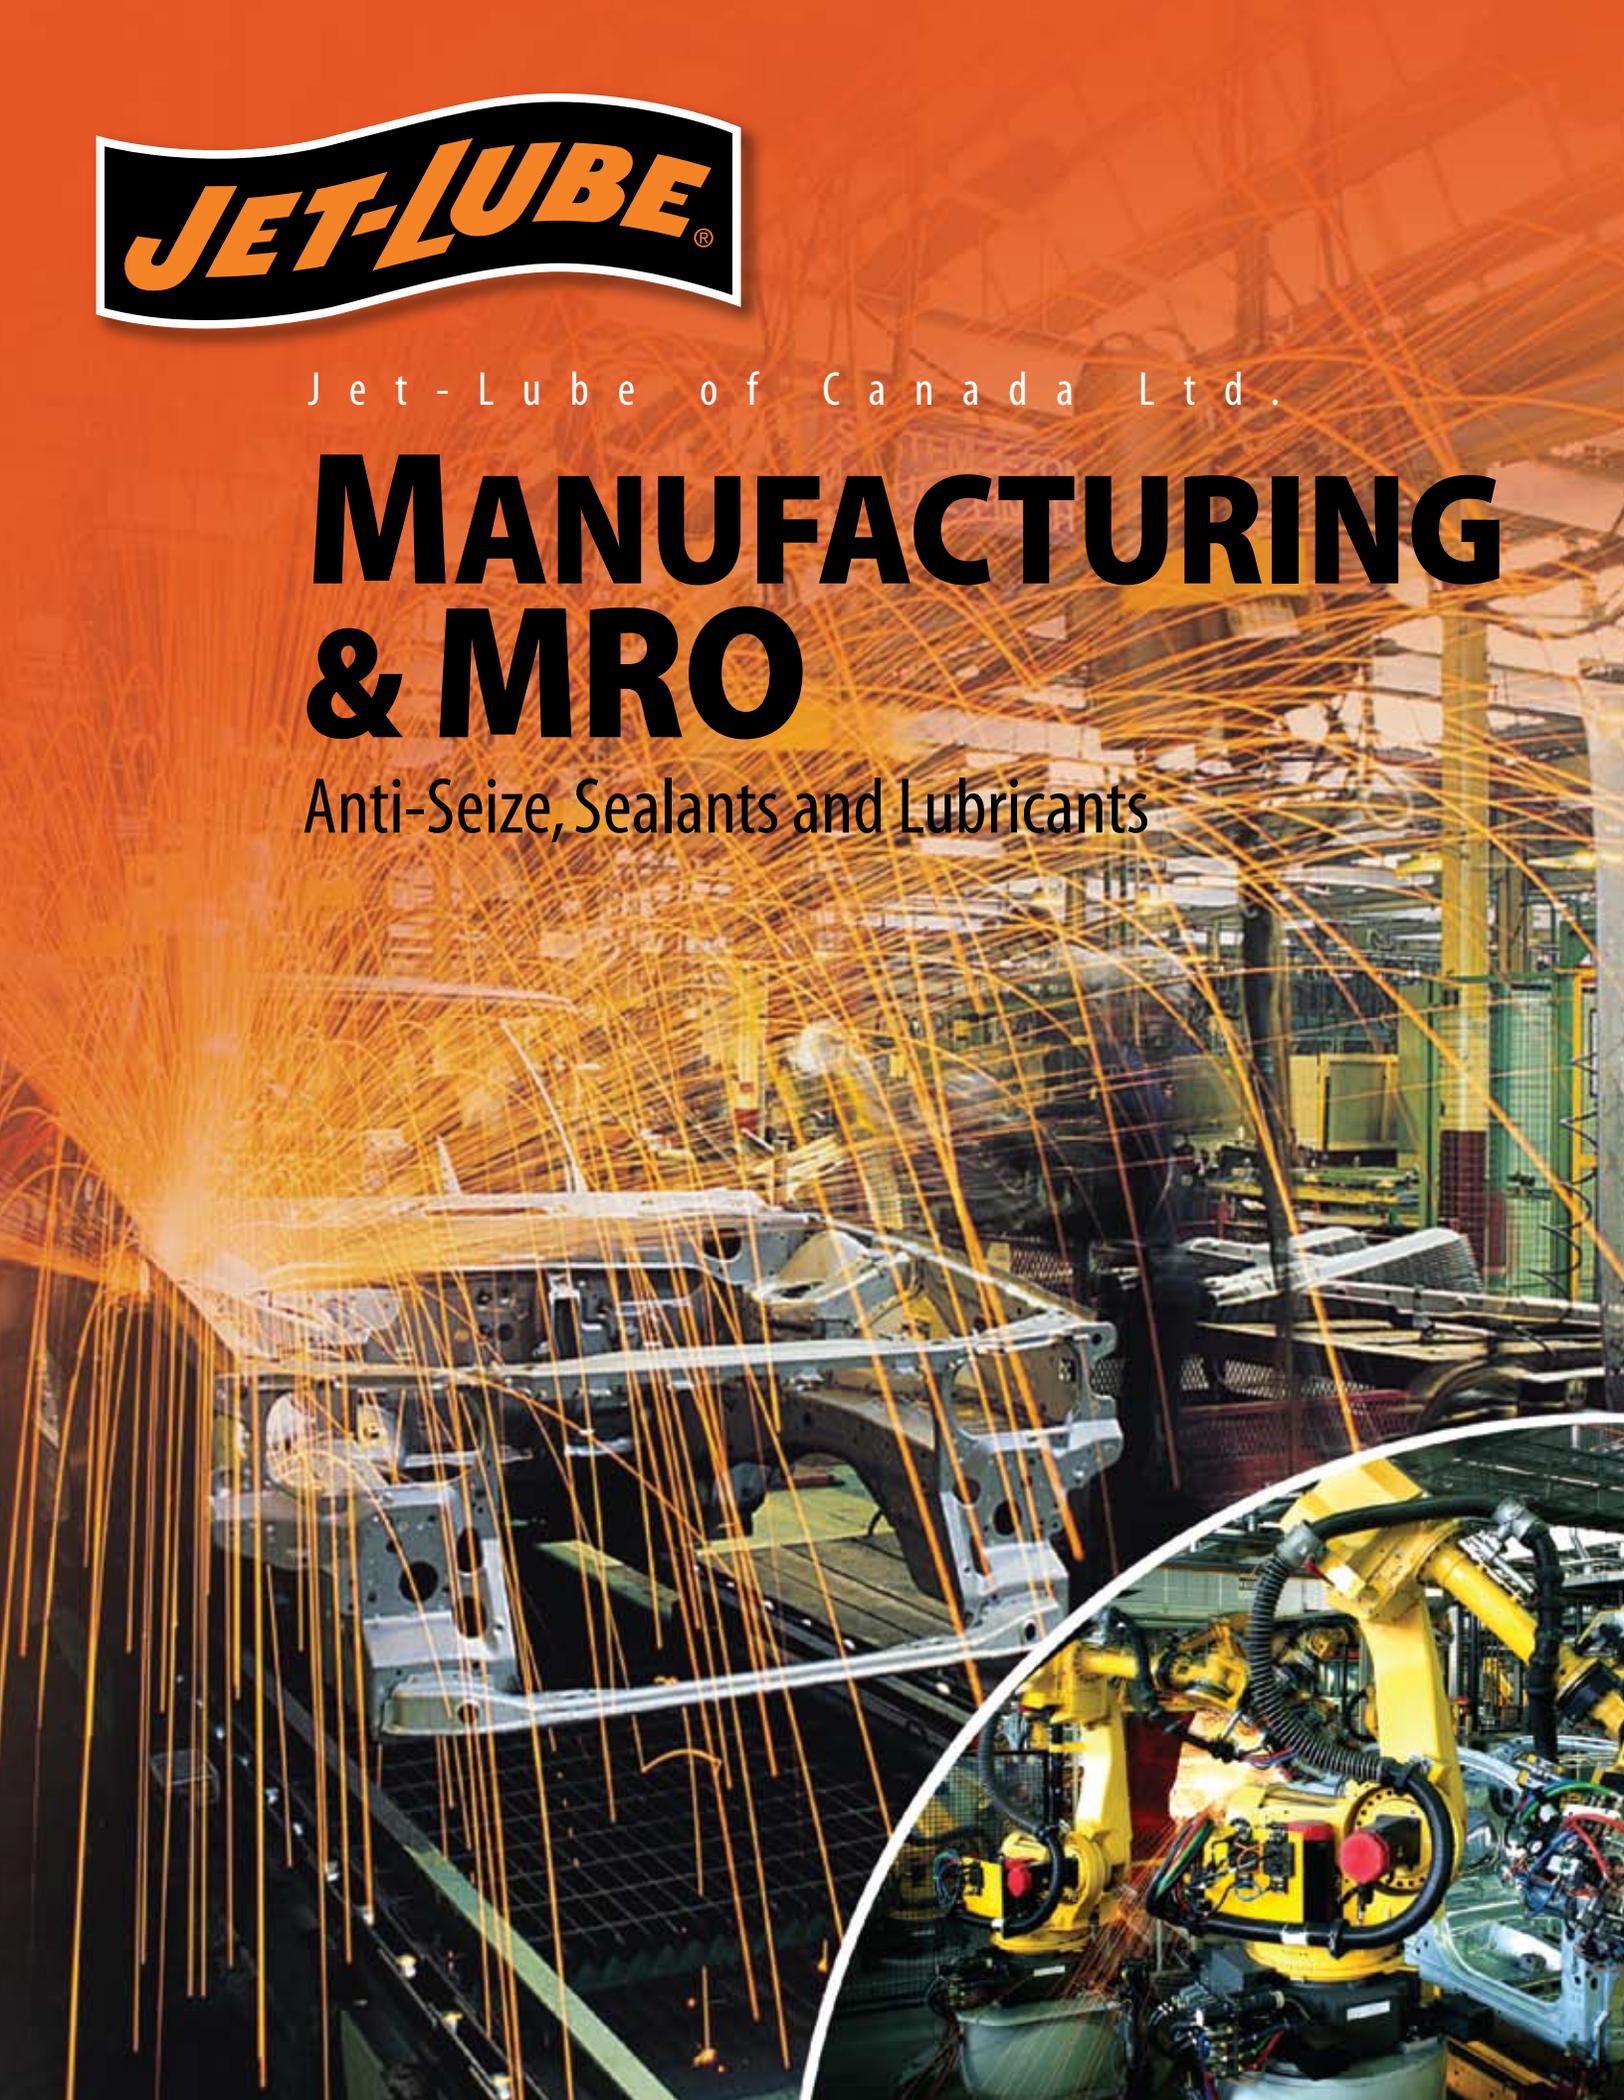



MANUFACTURING & MRO

Anti-Seize, Sealants and Lubricants

Featured Products

12/34 - Lubricant, Penetrant and Coating

AP-5 - High Temperature Grease with Molybdenum Disulphide

Cable-Lube - Wire Rope and Chain Lubricant

Clean-Up - Industrial Strength Cleaner and Degreaser

Clean-Up Plus - Organic Solvent Cleaner and Degreaser

EP Bearing Grease - Extreme Pressure Multi-Purpose Grease

JetPump - Two Stage Hydro-Testing Pump

JL-5000 - Environmentally Safe Water Based Cleaner

Kopr-Kote HT - High Temperature Anti-seize

Lapping Oil - Grinding and Polishing Oil

Magic Wrench - Super Penetrant

MotherCutter WB - Water Based Biodegradable Cutting Fluid

MP-50 - Low Friction Moly Paste Lubricant

OG-H - Open Gear Lubricant

Petro-Tape - PTFE Thread Seal Tape

Silicone Spray - Industrial Grade Lubricant

TF-15 - Thread Sealant

White Lithium - Premium All-Purpose Grease with PTFE

12/34 Lubricant and Penetrant



Operating Range -75°C to 150°C (-100°F to 300°F)

The foremost penetrating, moisture displacing, lubricating and corrosion preventative available today! Unequaled where salt water, salt spray or other harsh environments are encountered. Provides superior protection and anti-wear properties, penetrates into rusted, corroded and frozen metal parts, which will be easily loosened by means of superior 'creepability', removes moisture, prevents rust and corrosion.

SKU #	Size
37341	340 g aerosol
37343	500 ml trigger spray
37316	4 liter can
37320	20 liter pail
37375	205 liter drum

AP-5 High Temperature All-Purpose Grease



Operating Range -25°C to 288°C (-13°F to 550°F)

Recommended for use on ball, roller and sleeve bearings, shackles, conveyor chains, sealed assemblies, etc. Provides heavy-duty long-life protection in heavy equipment. When applied, it means that all your mechanical components, which are demanding superior lubrication, will last 2 to 10 times longer than when a regular grease has been applied. Especially recommended for lubrication points prone to neglect.

SKU #	Size
25067	250 ml squeeze tube
25050	400 g cartridge
25004	1 liter jar
25005	5 liter pail
25010	10 liter pail
25055	55 liter keg
25075	205 liter drum

CableLube Wire Rope & Chain Lubricant



Operating Range -57°C to 200°C (-70°F to 392°F)

Today's no. 1 wire rope lubricant and penetrant. When being applied, it will flow freely and will penetrate into the core of the wire rope. After being applied, the CableLube will set and become thicker, which helps it to stay put. As such, it will drastically reduce friction and this reduction in friction reduces micro-pitting and micro-fissions, thus reducing stress and fatigue fractures from forming in the wire rope. The result is a longer cable life, less downtime, less cost and more production.

SKU #	Size
CableLube	
306820	20 liter pail
306875	205 liter drum
Aerosol	
304741	370 g aerosol
CableLube Arctic	
304720	20 liter pail
304775	205 liter drum

Clean-Up™ Industrial Cleaner & Solvent



29 KV dielectric strength

Ideal for cleaning items, such as engine components, motors, machine parts, cement flooring, gears, chains, bearings, appliances, cables, tools, metal surfaces, injectors. Effectively dissolves grease, oil, paint, grime, dirt and dust. **NOTE: its high solvency can adversely affect certain paints and plastics, so product should be tested on critical surfaces, prior to large scale usage.**

SKU #	Size
61542	510 g aerosol
61535	5-US gal pail

Clean-Up Plus™ Organic Solvent Cleaner & Degreaser



29 KV dielectric strength

Specially formulated and designed to quickly dissolve and rinse away dirt, grease, grime, oil, tar and wax, while being both environmentally safe and ozone friendly. Ideal for a wide range of industrial cleaning applications, such as tools, chains, machine parts, electric motors, forklifts, bearings, etc. Safe on all metals and most plastics.

SKU #	Size
72542	15 oz aerosol
72535	5-US gal pail

EP Bearing Grease™ Extreme Pressure Multi-Purpose Grease



Operating Range -18°C to 165°C (0°F to 325°F)

Specially formulated for use on roller bearings, anti-friction bearings and journals, and is particularly useful where a single, multi-purpose product is desirable. This grease has a multitude of industrial applications, where an exceptionally high quality, multi-purpose lubricant is required. Is water resistant, highly tenacious and has excellent resistance to the effects of salt spray, heat, water, oxidation, high loads and other adverse conditions common to industrial usage.

SKU #	Size
30350	14 oz cartridge
30316	35 lb pail
30324	120 lb keg

JL 5000™ Water Based Cleaner & Degreaser



Operating Range 0°C to 100°C (32°F to 212°F)

The safest and most effective cleaner/degreaser available today! To be used for industrial cleaning applications for an effective removal of carbon, grease, oil and other organic deposits, while being both environmentally safe and ozone friendly. Safe for use on all metal parts and most plastics. When applying, follow the dilution ratio instructions.

SKU #	Size
71043	16 oz trigger spray
71033	1-US gal jug
71035	5-US gal jug
71029	50-US gal drum



JetPump Two-Stage Test and Injection Pump



Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.

SKU #	Size
JP03	3-US gal
JP05	5-US gal

Kopr-Kote HT High Temperature Anti-Seize



Operating Range -54°C to 815°C (-65° to 1500°F)

When used/applied, Kopr-Kote will protect against seizure, heat-freeze, galling, rust and corrosion, it lowers friction, permits re-use of fittings (thus saving you money on replacement), lowers maintenance costs, is not affected by contraction, expansion or vibration. Recommended for production and maintenance jobs where speed in assembling and dismantling is essential. **NOTE: not suitable for use with oxygen or LPG Lines.**

SKU #	Size
10250	400 g cartridge
10202	225 ml brush top
10203	450 ml brush top
10204	1 liter jar

Lapping Oil MoS₂ Dry Film Lubricant



Operating Range -40°C to 120°C (-40°F to 248°F)

A high quality, low viscosity oil, to be used as a carrier for a wide variety of abrasives used in polishing molds, toolings, metal surfaces, etc. Cools and lubricates the surface being finished, keeps abrasives in suspension and removes residue.

SKU #	Size
188675	200 liter drum

Magic Wrench® Super Penetrant



Operating Range -51°C to 177°C (-60°F to 350°F)

Attacks rust and corrosion quickly and safely, in order to free corroded parts, loosen nuts and assist in the disassembly of mechanical components. Is safe on all metals and plastics. Ideal product for the lubrication and conditioning of air tools.

SKU #	Size
39541	13 oz aerosol
39533	1-US gal jug
39535	5-US gal jug



MotherCutter WB Water Based Biodegradable Cutting Fluid



Operating Range -5°C to 85°C (23°F to 185°F)

An Eco-Certified, biodegradable water based cutting fluid designed for a wide range of machine shop applications for both ferrous and non-ferrous metals. Will help to improve your tool life, reduce downtime, reduce HAZMAT disposal costs, and increase your scrap value as it is now "oil free" and ready for pickup. It is the ideal product for light-duty machining and small CNC machines. Recommended at full strength for flooding applications, metalworking involving drilling, sawing, broaching, milling, tapping, threading reaming, drawing, facing, grinding or field machining applications such as pipe cutting and beveling.

SKU #	Size
184316	4 liter jug
184320	20 liter pail

MP-50™ Low Friction Moly Paste



Operating Range -25°C to 400°C (-13°F to 750°F)

A product with a multitude of uses. It protects production tools and taps, prevents seizure and freezing of bolts and studs. It reduces torque on makeup and dismantling of any threaded or screwed fitting, used extensively for lubricating bushings and guideposts on die sets. Also used on assembly and disassembly of press and shrink fits of pins, shafts, bushings, sprockets, gears and bearings. Eliminates galling and distortion. May be applied directly to hot surfaces without running off or dripping.

SKU #	Size
28002	225 ml brush top
28004	1 liter jar
28005	5 liter pail
28010	10 liter pail
28050	400 g cartridge

OG-H Open Gear Lubricant



Operating Range -18°C to 285°C (-0°F to 550°F)

To be used on exposed gears of all types, on steam and power winches, hoists, mill and forge equipment, construction machinery, power shovels and dredges, shovel gears, pulverizers, bull gears, etc. Can be applied on the bearings in slow moving equipment wherever high unit pressures occur. OG-H has excellent "stay put" qualities, will not melt or throw-off and is ideal for use at high temperatures, where other lubricants become runny or drip off.

SKU #	Size
26050	14 oz cartridge
26004	1 liter jar
26005	5 liter pail
26015	15 liter pail
17955	55 liter keg

Petro-Tape PTFE Thread Seal Tape



Operating Range -240°C to 260°C (-400°F to 500°F)

To be used on threaded pipe connections, hydraulic pressure lines, etc. Suitable for use on lines carrying fuels (such as gasoline, diesel fuel, kerosene and aircraft oils), acids and alkalis, solvents and gases (specifications of various mediums available upon request). Because of its characteristics, Petro-Tape is far superior to other PTFE tapes for heavy-duty use. ULC Listed: for sealing metal threaded pipe connections not exceeding 3" for natural gas and methane, gasoline, petroleum oils, propane and butane.

SKU #	Size
30790	1/2" x 180" roll
30791	3/4" x 180" roll
30792	1" x 180" roll
30793	1/2" x 540" roll
30794	3/4" x 540" roll
30795	1" x 540" roll
30798	1" x 540" metal roll
30800	1/2" x 540" cardboard roll

Silicone Spray Industrial Grade Lubricant



Operating Range -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

SKU #	Size
50741	300 g aerosol

TF-15 Thread Sealing Compound



Operating Range -23°C to 315°C (-10°F to 600°F)

Excellent for use on all threads subject to vibration, surge, pressure and temperature fluctuations. Particularly useful in areas subject to H₂S and salt water. Recommended for lines carrying a wide variety of oils, solvents, gases (**except oxygen**), acids, alkalis and steam. Prevents galling and thread wear, seals badly worn threads and greatly increases connection life. Seals at temperatures to 315°C and pressures to 10,000 PSI.

SKU #	Size
23002	225 ml brush top
23067	250 ml tube
23004	1 liter jar
23005	5 liter pail
23010	10 liter pail
23015	15 liter pail

White Lithium Grease All-Purpose Grease with PTFE



Operating Range -18°C to 190°C (0°F to 370°F)

A premium all-purpose grease that provides superior performance and protection for metal-to-metal (moving) parts, it penetrates and forms a long-lasting protective film to withstand heavy loads and high speeds. Prevents rust and corrosion, eliminates squeaks and squeals and will not run or wash away. Excellent for industrial applications, such as machinery tools, overhead garage door channels, fan motors, slides, etc.

SKU #	Size
50350	14 oz cartridge
50341	13 oz aerosol
50305	1 lb can
50316	35 lb pail
50324	120 lb keg

Jet-Lube products listed alphabetically

12/34	Ezy-Open	Jet-Plex EP	O	T
202 Moly-Lith	Ezy-Pak 100	JetPump	OG-H	Temp-Guard
550	Ezy-Pak 115		Oven Chain Lubricant 	TF-15
769	Ezy-Pak 120	K		TF-500
	Ezy-Pak 125	Kiln Grease	P	TFW
A	Ezy-Turn 2	Kollar King	Petro-Tape	Top Gun
Alco EP	Ezy-Turn 3	Kopr-Kote	PFPE Grease	Tuff E Nuff
Alco-EP ECF 	Ezy-Turn 3 Arctic	Korr-Guard	Pitless Adapter Lube 	
Alco-EP 73 Plus	Ezy-Turn 4	Kovr-Kote	Plumber's Pal	U
AP-1 White	Ezy-Turn 5		Powr-Kote	Ultra
AP-5	Ezy-Turn 6	L	PS Terminal	
API-Modified Arctic	Ezy-Turn 8	Lapping Oil		V
API-Modified	Ezy-Turn 12	LBX -Special	R	V-2
Arctic Grease	Ezy-Turn 14	Lite Knight	RD-N	
AX-2	Ezy-Turn 22		RD-P	W
	Ezy-Turn Body Fill	M	Renew	Well-Guard 
B	Ezy-Turn H ₂ S	Magic Wrench 	Riser Bolt Lube	White Knight 
Bullseye 	Ezy-Turn Polar	Marine Kopr	Rubber Lubricant/Mold Release	White Lithium
	Ezy-Turn PVS	Marine Moly	RuFF 9	Wire Line Lubricant ECF 
C		Marine MP	RuFF 21	WLD
CableLube	F	Marine Wire Rope & Hawser Grease	Run-N-Seal	WRL
CB-2	FMG 	Moly-Arc	Run-N-Seal ECF 	Z
CC-Lube 	Food Grade Silicone 	Moly-Mist	Rust Guard	Z-50
Clean-Up		Moly Petrolatum		Z-Plate Aerosol
Clean-Up Plus	G	Moly-Arc	S	Zinc Petrolatum
Creeper-Lube	Gear-Guard	MotherCutter 	Seal Guard	
	Graphite Petrolatum	MP-50	Seal-Guard ECF 	
E			Sheen Free 	
Easy-Clean	J	N	Silicone Compound DM	
Easy-Clean Liquid	J-75	NCS-30	Silicone Spray	
ECF Anti-Seize 	J-89	NCS-30 ECF 	Silver Plus	
Eco-Safe 	JL-5000 	Nikal	SS-30	
EMS 	Jacking System Grease ECF 	Nikal Nuclear		
Enviro-Guard 	Jet-Lok PS-50	No. 33		
Enviro-Safe	Jet-Lok PS-67	No. 60		
EP Bearing Grease	Jet-Lok TL-72	Nuclear Nonmetallic		
Extreme	Jet-Lube 21			



Qualifying products will bear the thumbprint.

www.jetlubecanada.com



CONTACT US

Head Office

3820-97 Street NW
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449
Fax: (780) 463-7454

sales@jetlubecanada.com
www.jetlubecanada.com

Vice President & General Manager
Gary McCormick
garym@jetlubecanada.com

National Sales & Marketing Manager:
Jim McLaws
jdm@jetlubecanada.com

Technical Service:
Neil Ruel
neilr@jetlubecanada.com

Inside Sales:
Maleena Carreiro
maleenab@jetlubecanada.com



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.