




J e t - L u b e o f C a n a d a L t d .

# MINING & DRILLING EXPLORATION

Anti-Seize, Sealants and Lubricants

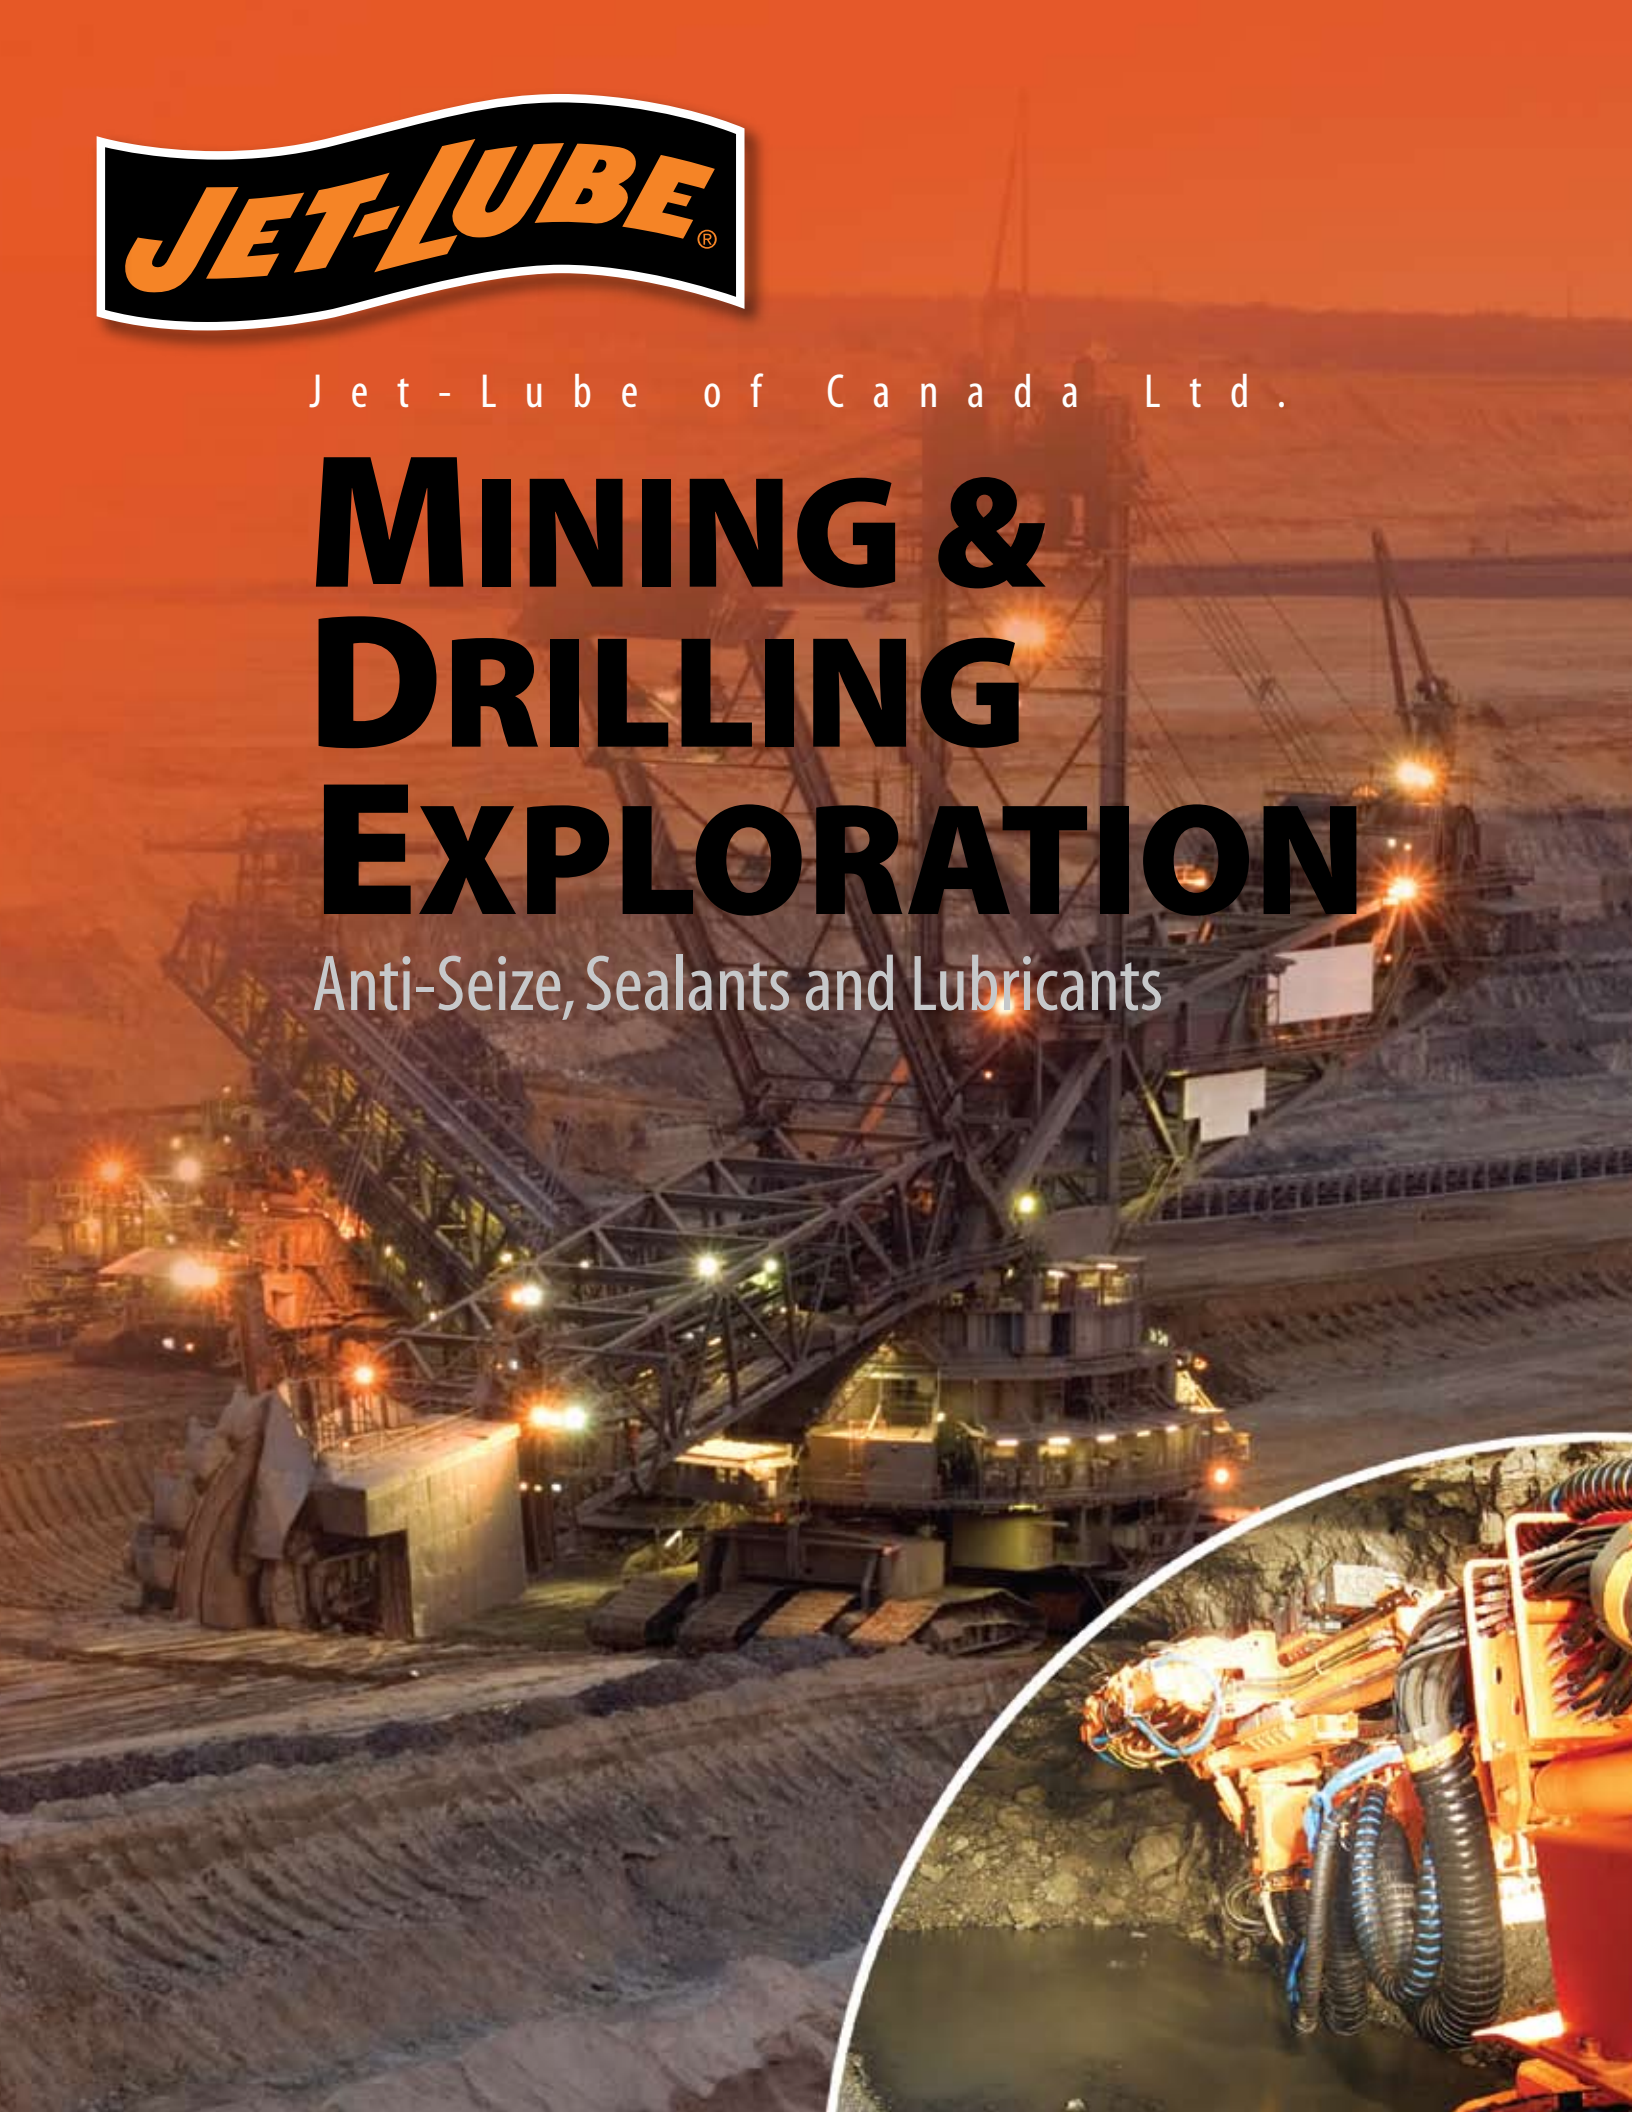



# MINING & DRILLING EXPLORATION

Anti-Seize, Sealants and Lubricants

## Featured Products

**12/34** - Lubricant, Penetrant and Coating

**Alco-EP** - Premium Multi-Purpose Grease

**Alco-EP 73+** - Premium Water Resistant Grease

**CableLube** - Wire Rope and Chain Lubricant

**Clean-Up Plus** - Organic Solvent Cleaner and Degreaser

**EP Bearing Grease** - Extreme Pressure Multi-Purpose Grease

**J-75** - Lead Free Drill Steel Lubricant

**J-89** - Lead Free Drill Steel Lubricant

**JetPump** - Two-Stage Test and Injection Pump

**Kopr-Kote HT** - High Temperature Anti-Seize

**Magic Wrench** - Super Penetrant

**OG-H** - Open Gear Lubricant

**Petro-Tape** - PTFE Thread Seal Tape

**RD-N** - High Performance Synthetic Rock Drill Oil

**RD-P** - Percussion Rock Drill Oil

**RuFF** - Heavy-Duty Rust and Corrosion Inhibitor

**Silicone Compound DM** - Moisture Proofing Sealant and Lubricant

**Silicone Spray** - Industrial Grade Lubricant

**V-2** - Multi-Purpose PTFE Thread Sealant

## 12/34 Lubricant and Penetrant



**Operating Range** -75°C to 150°C (-100°F to 300°F)

The foremost penetrating, moisture displacing, lubricating and corrosion preventative available today! Unequaled where salt water, salt spray or other harsh environments are encountered. Provides superior protection and anti-wear properties, penetrates into rusted, corroded and frozen metal parts, which will be easily loosened by means of superior 'creepability', removes moisture; prevents rust and corrosion.

SKU #	Size
37341	340 g aerosol
37343	500 ml trigger spray
37316	4 liter can
37320	20 liter pail
37375	205 liter drum

## Alco-EP Premium Multi-Purpose Grease



**Operating Range** -32°C to 232°C (-25°F to 450°F)

Designed for friction and anti-friction bearings, bushings, chassis points, U-joints, pivot pins and a wide range of industrial applications. Provides superior wear protection against extreme pressure and is highly water resistant. Alco-EP has a 60 pound rating in the TIMKEN load test, which indicates that it has an excellent load-carrying ability.

SKU #	Size
37050	14 oz cartridge
37016	35 lb pail
37055	120 lb keg
37029	400 lb drum

## Alco-EP-73 Plus™ Premium Water Resistant Grease



**Operating Range** -32°C to 230°C (-25°F to 450°F)

Specially formulated and developed for conditions where extreme water resistance is necessary. Can be used in applications where tolerances are low and/or speeds are high. Provides superior rust and corrosion protection for maximum service life under harsh conditions.

SKU #	Size
37750	37750
37716	37716
37724	37724
37729	37729

## CableLube Wire Rope & Chain Lubricant



**Operating Range** -57°C to 200°C (-70°F to 392°F)

**Today's no. 1 wire rope lubricant and penetrant.** When being applied, it will flow freely and will penetrate into the core of the wire rope. After being applied, the lube will set and become thicker, which helps it to stay put. As such, it will drastically reduce friction and this reduction in friction reduces micro-pitting and micro-fissions, thus reducing stress and fatigue fractures from forming in the wire rope. The result is a longer cable life, less downtime, less cost and more production.

SKU #	Size
CableLube	
306820	20 liter pail
306875	205 liter drum
Aerosol	
304741	370 g aerosol
CableLube Arctic	
304720	20 liter pail
304775	205 liter drum

## Clean-Up Plus™ Organic Solvent Cleaner & Degreaser



**29 KV dielectric strength**

Specially formulated and designed to quickly dissolve and rinse away dirt, grease, grime, oil, tar and wax, while being both environmentally safe and ozone friendly. Ideal for a wide range of industrial cleaning applications, such as tools, chains, machine parts, electric motors, forklifts, bearings, etc. Safe on all metals and most plastics.

SKU #	Size
72542	15 oz aerosol
72535	5-US gal pail

## EP Bearing Grease™ Extreme Pressure Multi-Purpose Grease



**Operating Range** -18°C to 165°C (0°F to 325°F)

Specially formulated for use on roller bearings, anti-friction bearings and journals, and is particularly useful where a single, multi-purpose product is desirable. This grease has a multitude of applications, where an exceptionally high quality, multi-purpose lubricant is required. Is water resistant, highly tenacious and has excellent resistance to the effects of salt spray, heat, water, oxidation, high loads and other adverse conditions common to industrial/mining usage.

SKU #	Size
30350	14 oz cartridge
30316	35 lb pail
30324	120 lb keg

## J-75® Lead Free Drill Steel Lubricant



**Operating Range** -18°C to 260°C (0°F to 500°F)

Recommended for percussion rock drilling, blast hole drilling, road construction, logging, mining, coal drilling, pneumatic and tract drilling. Being brushable, it provides positive protection to 260°C (500°F) and will not run out of hot threads. The superior anti friction properties reduce thread wear and lengthen steel and coupling life. J-75 is lead free.

SKU #	Size
24812	2-US gal pail

## J-89™ Lead Free Drill Steel Lubricant



**Operating Range** -18°C to 232°C (0°F to 450°F)

Recommended for percussion rock drilling, blast hole drilling, road construction, logging, mining, coal drilling, pneumatic and tract drilling. Being pumpable, it provides positive protection to 232°C (450°F) and will not run out of hot threads. The superior anti friction properties reduce thread wear and lengthens steel and coupling life. J-89 is lead free.

SKU #	Size
24415	5-US gal pail

## JetPump Two-Stage Test and Injection Pump



**Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi**

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.

SKU #	Size
JP03	3-US gal
JP05	5-US gal

## Kopr-Kote HT High Temperature Anti-Seize



**Operating Range** -54°C to 815°C (-65° to 1500°F)

When used/applied, Kopr-Kote will protect against seizure, heat-freeze, galling, rust and corrosion. It lowers friction, permits re-use of fittings (thus saving you money on replacement), lowers maintenance costs and is not affected by contraction, expansion or vibration. Recommended for production and maintenance jobs where speed in assembling and dismantling is essential. **NOTE: not suitable for use with oxygen or LPG Lines.**

SKU #	Size
10250	400 g cartridge
10202	225 ml brush top
10203	450 ml brush top
10204	1 liter jar

## Magic Wrench® Super Penetrant



**Operating Range** -51°C to 177°C (-60°F to 350°F)

Attacks rust and corrosion quickly and safely, in order to free corroded parts, loosen nuts and assist in the disassembly of mechanical components. Is safe on all metals and plastics. Ideal product for the lubrication and conditioning of air tools.

SKU #	Size
39541	13 oz aerosol
39533	1-US gal jug
39535	5-US gal jug



## OG-H Open Gear Lubricant



**Operating Range** -18°C to 285°C (-0°F to 550°F)

To be used on exposed gears of all types, on steam and power winches, hoists, mill and forge equipment, construction machinery, power shovels and dredges, shovel gears, pulverizers, bull gears, etc. Can be applied on the bearings in slow moving equipment wherever high unit pressures occur. OG-H has excellent "stay put" qualities, will not melt or throw-off and is ideal for use at high temperatures, where other lubricants become runny or drip off.

SKU #	Size
26050	14 oz cartridge
26004	1 liter jar
26005	5 liter pail
26015	15 liter pail
17955	55 liter keg

## Petro-Tape PTFE Thread Seal Tape



**Operating Range** -240°C to 260°C (-400°F to 500°F)

To be used on threaded pipe connections, hydraulic pressure lines, etc. Suitable for use on lines carrying fuels (such as gasoline, diesel fuel, kerosene and aircraft oils), acids and alkalis, solvents and gases (specifications of various mediums available upon request). Because of its characteristics, Petro-Tape is far superior to other PTFE tapes for heavy-duty use. ULC listed for sealing metal threaded pipe connections not exceeding 3".

SKU #	Size
30790	1/2" x 180" roll
30791	3/4" x 180" roll
30792	1" x 180" roll
30793	1/2" x 540" roll
30794	3/4" x 540" roll
30795	1" x 540" roll
30798	1" x 540" metal roll
30800	1/2" x 540" cardboard roll

## RD-N™ Synthetic Rock Drill Oil



**Operating Range** -32°C to 220°C (-25°F to 430°F)

Recommended for all pneumatically operated rock drill oils used in monitoring or environmentally sensitive drilling applications. Provides state-of-the-art lubrication for all makes of pneumatic percussion tools under severe conditions. RD-N is environmentally safe and undetectable to maintain site integrity. Exceeds the stringent test specifications and guideline, as specified in the EPA 8010, EPA 8240 and EPA 8270 guidelines.

SKU #	Size
18033	1-US gal pail
18035	5-US gal pail

## RD-P™ Percussion Rock Drill Oil



**Operating Range** -18°C to 205°C (-0°F to 400°F)

Designed to lubricate percussive drilling equipment such as hydraulic or pneumatic drills, hammers, bits, etc. In use, it will coat the walls and internal components of rock drilling equipment, providing a protective film that prevents rust and corrosion, when the equipment is not in use.

SKU #	Size
18215	15 liter pail

## RuFF Heavy-Duty Rust & Corrosion Inhibitor



### Operating Ranges

RuFF 21 Bulk	-2°C to 60°C (28°F to 140°F)
RuFF 9 Bulk & Aerosol	-40°C to 60°C (-40°F to 140°F)

Formulated to act as a high performance corrosion inhibitor that tenaciously adheres to all metals. Offers superior protection against water, salt water spray, calcium and chloride, oxidation and other harsh conditions. Ideal for use on vehicles, mining trucks and trailers, and as a protective undercoating.

SKU #	Size
RuFF 21	
144120	20 liter pail
144175	205 liter drum
RuFF 9	
199120	20 liter pail
199175	205 liter drum
RuFF 9	
199141	340 g aerosol

## Silicone Compound DM™ Moisture Proofing Sealant & Lubricant



### Operating Range -57°C to 204°C (-70°F to 400°F)

To be used as a protection against moisture. Because of its low volatility, non-melting thickener and high dielectric strength, it is the ideal compound to protect ignition systems, spark plug connections, electrical assemblies, cable and battery terminals and other similar applications.

SKU #	Size
73560	5-oz tube
73503	450 ml brush-top
73504	1 liter jar
73550	14 oz cartridge
73506	5 lb pail
73522	10 lb pail
73516	35 lb pail
73524	120 lb keg
73529	400 lb drum

## Silicone Spray Industrial Grade Lubricant



### Operating Range -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is an excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

SKU #	Size
50741	300 g aerosol

## V-2™ Multi-Purpose PTFE Thread Sealant



### Operating Ranges -56°C to 260°C (-70°F to 500°F) 69000 kPa liquids 14000 kPa gases

A soft setting non-petroleum based sealant designed for use with potable water, liquids and gases where immediate pressurization is desirable or required. May be used on steel, aluminium, brass, copper, iron, fiberglass, etc. Recommended for threaded pipes carrying air, diesel fuel, natural gas, etc. (specifications of various mediums available upon request). Pressures to 10,000 Psi for liquids and 2,000 Psi for gases.

SKU #	Size
22002	225 ml brush top
22004	1 liter jar
22005	5 liter pail
22010	10 liter pail
22055	55 liter keg

## Jet-Lube products listed alphabetically

12/34	Ezy-Open	Jet-Plex EP	<b>O</b>	<b>T</b>
202 Moly-Lith	Ezy-Pak 100	JetPump	OG-H	Temp-Guard
550	Ezy-Pak 115		Oven Chain Lubricant 	TF-15
769	Ezy-Pak 120	<b>K</b>		TF-500
	Ezy-Pak 125	Kiln Grease	<b>P</b>	TFW
<b>A</b>	Ezy-Turn 2	Kollar King	Petro-Tape	Top Gun
Alco EP	Ezy-Turn 3	Kopr-Kote	PFPE Grease	Tuff E Nuff
Alco-EP ECF 	Ezy-Turn 3 Arctic	Korr-Guard	Pitless Adapter Lube 	
Alco-EP 73 Plus	Ezy-Turn 4	Kovr-Kote	Plumber's Pal	<b>U</b>
AP-1 White	Ezy-Turn 5		Powr-Kote	Ultra
AP-5	Ezy-Turn 6	<b>L</b>	PS Terminal	
API-Modified Arctic	Ezy-Turn 8	Lapping Oil		<b>V</b>
API-Modified	Ezy-Turn 12	LBX -Special	<b>R</b>	V-2
Arctic Grease	Ezy-Turn 14	Lite Knight	RD-N	
AX-2	Ezy-Turn 22		RD-P	<b>W</b>
	Ezy-Turn Body Fill	<b>M</b>	Renew	Well-Guard 
<b>B</b>	Ezy-Turn H <sub>2</sub> S	Magic Wrench 	Riser Bolt Lube	White Knight 
Bullseye 	Ezy-Turn Polar	Marine Kopr	Rubber Lubricant/Mold Release	White Lithium
	Ezy-Turn PVS	Marine Moly	RuFF 9	Wire Line Lubricant ECF 
<b>C</b>		Marine MP	RuFF 21	WLD
CableLube	<b>F</b>	Marine Wire Rope & Hawser Grease	Run-N-Seal	WRL
CB-2	FMG 	Moly-Arc	Run-N-Seal ECF 	<b>Z</b>
CC-Lube 	Food Grade Silicone 	Moly-Mist	Rust Guard	Z-50
Clean-Up		Moly Petrolatum		Z-Plate Aerosol
Clean-Up Plus	<b>G</b>	Moly-Arc	<b>S</b>	Zinc Petrolatum
Creeper-Lube	Gear-Guard	MotherCutter 	Seal Guard	
	Graphite Petrolatum	MP-50	Seal-Guard ECF 	
<b>E</b>			Sheen Free 	
Easy-Clean	<b>J</b>	<b>N</b>	Silicone Compound DM	
Easy-Clean Liquid	J-75	NCS-30	Silicone Spray	
ECF Anti-Seize 	J-89	NCS-30 ECF 	Silver Plus	
Eco-Safe 	JL-5000 	Nikal	SS-30	
EMS 	Jacking System Grease ECF 	Nikal Nuclear		
Enviro-Guard 	Jet-Lok PS-50	No. 33		
Enviro-Safe	Jet-Lok PS-67	No. 60		
EP Bearing Grease	Jet-Lok TL-72	Nuclear Nonmetallic		
Extreme	Jet-Lube 21			



Qualifying products will bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)



## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454


[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

Vice President & General Manager  
Gary McCormick  
[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

National Sales & Marketing Manager:  
Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

Technical Service:  
Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

Inside Sales:  
Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)

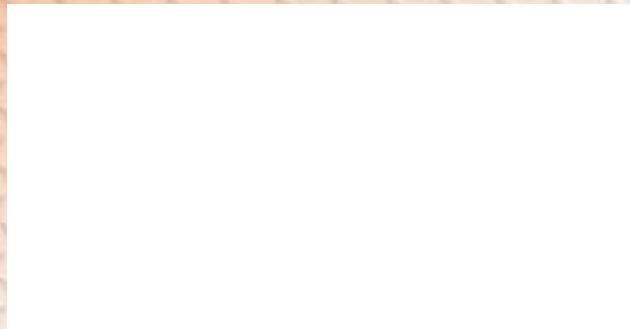

Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.

