




J e t - L u b e o f C a n a d a L t d .

# WATER WELL DRILLING

Anti-Seize, Sealants and Lubricants

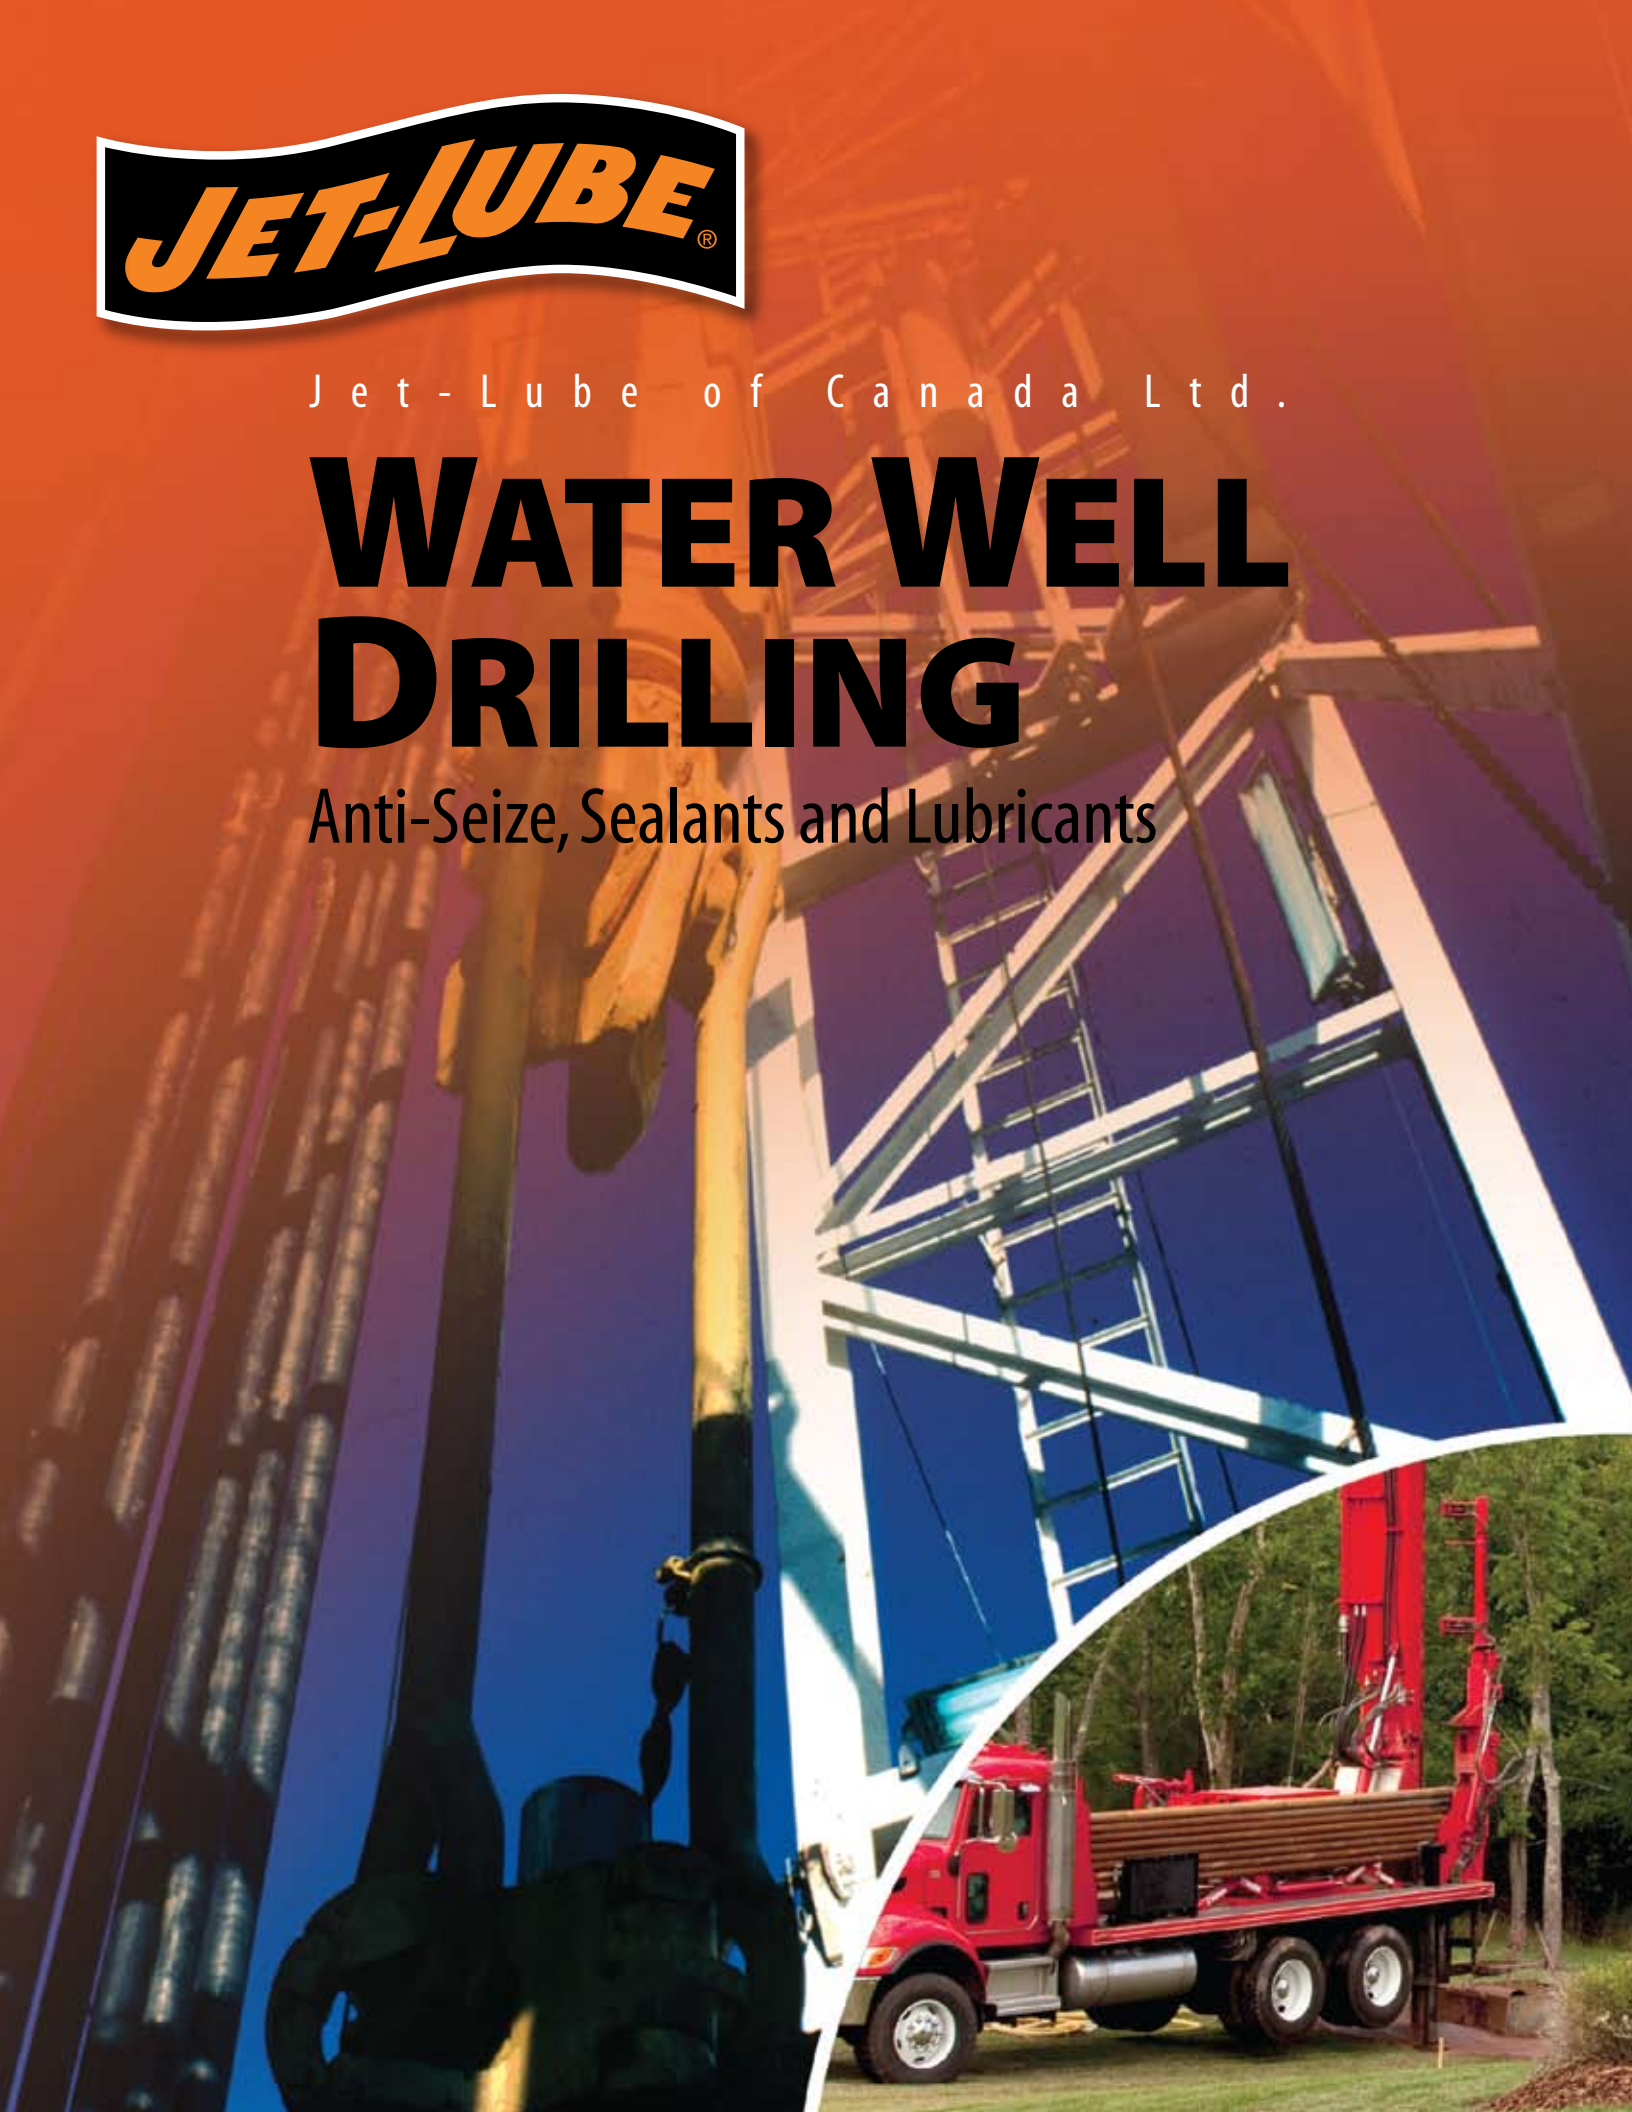



# WATER WELL DRILLING

Lubricants, Anti-Seize & Thread Compounds

## Featured Products

**Bullseye** - Environmental Thread Compound

**CC-Lube** - Clean, Clear, Semi-Synthetic Multi-Purpose Lubricant

**Eco-Safe** - Non-Metallic Thread Compound

**Enviro-Guard** - Drop Pipe Lubricant and Sealant

**JetPump** - Two-Stage Test and Injection Pump

**Lite-Knight** - Tool Joint Compound

**NSC-30** - Industrial Anti-Seize

**Petro-Tape** - PTFE Thread Seal Tape

**Pitless Adapter Lube** - Premium Assembly Lubricant / Preservative

**Silicone Compound DM** - Moisture Proofing Sealant and Lubricant

**Silicone Spray** - Industrial Grade Lubricant

**V-2** - Multi-Purpose PTFE Thread Sealant

**Well-Guard** - Monitor Well Drilling Thread Sealant



Qualifying products will  
bear the thumbprint.

For a complete listing of our products visit: [www.jetlubecanada.com](http://www.jetlubecanada.com)

## Bullseye® Environmental Thread Compound (Non-Hydrocarbon)



Operating Range -7°C to 204°C (20°F to 400°F)

Specifically designed for sensitive water well and other environmental drilling applications, which require the use of a petroleum hydrocarbon-free product. Provides maximum protection against galling, seizing and damage to threads, while maintaining water well integrity. BULLSEYE is biodegradable and completely non-toxic.

SKU #	Size
66823	1 US gal pail
66813	2 US gal pail



## CC-Lube™ Clean, Clear, Semi-Synthetic Multi-Purpose Lubricant



Operating Range -18°C to 204°C (0°F to 400°F)

May be safely used on a variety of surfaces including metal, plastic, rubber (viton, neoprene, buna, HSN) vinyl, stainless steel and nylon in a multitude of utility applications. Unsurpassed in reducing friction, extreme water resistance, extends machine and equipment life, preventing the formation of rust and corrosion over a broad temperature range. Contains anti-bacterial additives to eliminate bacterial culturing.

SKU #	Size
70550	14 oz cartridge
70623	1-US gal pail
70516	35 lb pail
70524	120 lb keg
70529	400 lb drum



## Eco-Safe™ Non-Metallic Thread Compound



Operating Range -29°C to 260°C (-20°F to 500°F)

Recommended for use in casing applications, because of its high frictional properties and is especially effective for invert or high-pH muds. Facilitates a consistent, easy make-up on par with traditional thread compounds, without the cost volatility and environmental concerns associated with metallic compounds. Its extreme pressure additives provide additional protection against seizing and galling. ECO-SAFE is non-metallic and completely biodegradable.

SKU #	Size
14523	1 gal US pail
14512	2 US gal pail
14515	5 US gal pail



## Enviro-Guard™ Drop Pipe Lubricant and Sealant



Operating Range -29°C to 260°C (-20°F to 500°F)

Specially formulated to assist in the assembly/disassembly of downhole casing for water wells. Ideal for use on high-chrome connections. Provides superior lubrication under high loads with galling resistance equivalent to heavy-metal based compounds. ENVIRO-GUARD is metal-free and is biodegradable.

SKU #	Size
18423	1 gal US pail
18412	2 US gal pail
18415	5 US gal pail



## JetPump Two-Stage Test and Injection Pump



Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.

SKU #	Size
JP03	3-US gal
JP05	5-US gal

## Lite-Knight Tool Joint Compound



Operating Range -18°C to 205°C (0°F to 400°F)

Primarily designed for use in water well drilling applications. Provides outstanding protection in shallow depths and softer formations, where the makeup and breakout of tool joints remain vital. Also suitable for use in seismic work and coal testing. LITE-KNIGHT is lead-free.

SKU #	Size
11907	7 liter pail
11915	15 liter pail

## Petro-Tape PTFE Thread Seal Tape



Operating Range -240°C to 260°C (-400°F to 500°F)

To be used on threaded pipe connections, hydraulic pressure lines, etc. Suitable for use on lines carrying fuels (such as gasoline, diesel fuel, kerosene and aircraft oils), acids and alkalis, solvents and gases (specifications of various mediums available upon request). ULC listed for natural gas, methane, propane, butane, gasoline and petroleum oils.

SKU #	Size
30790	1/2" x 180" roll
30791	3/4" x 180" roll
30792	1" x 180" roll
30793	1/2" x 540" roll
30794	3/4" x 540" roll
30795	1" x 540" roll
30798	1" x 540" metal roll
30800	1/2" x 540" cardboard roll

## Pitless Adapter Lube™ Premium Assembly Lubricant/Preservative



Operating Range -40°C to 204°C (-40°F to 400°F)

Specially formulated to assist in the assembly and preservation of pitless adapters in water well casing applications. Can also be used for other elastomer installation applications. Incorporates PTFE and other natural food grade boundary lubricants to provide anti-seize technology, which makes disassembly a much easier task in case the base fluids are leached away, biodegraded or absorbed into the elastomer.

SKU #	Size
71741	12 oz aerosol



## Silicone Compound DM™ Moisture Proofing Sealant & Lubricant



**Operating Range** -57°C to 204°C (-70°F to 400°F)

To be used as a protection against moisture. Because of its low volatility, non-melting thickener and high dielectric strength, it is the ideal compound to protect ignition systems, spark plug connections, electrical assemblies, cable and battery terminals and other similar applications.

SKU #	Size
73560	5-oz tube
73503	450 ml brush-top
73504	1 liter jar
73550	14 oz cartridge
73506	5 lb pail
73522	10 lb pail
73516	35 lb pail
73524	120 lb keg
73529	400 lb drum

## Silicone Spray Industrial Grade Lubricant



**Operating Range** -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is an excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

SKU #	Size
50741	300 g aerosol

## V-2™ Multi-Purpose PTFE Thread Sealant



**Operating Ranges** -56°C to 260°C (-70°F to 500°F)  
69000 kPa liquids 14000 kPa gases

A soft setting non-petroleum based sealant designed for use with potable water, liquids and gases where immediate pressurization is desirable or required. May be used on steel, aluminium, brass, copper, iron, reinforced fibre glass, polyethylene, PVC and CPVC. Recommended for threaded pipes carrying air, CO<sub>2</sub>, diesel fuel, H<sub>2</sub>S, inert gases, refrigerants, etc. (specifications of all mediums available upon request). Pressures to 10,000 Psi for liquids and 2,000 Psi for gases.

SKU #	Size
22002	225 ml brush top
22004	1 liter jar
22005	5 liter pail
22010	10 liter pail
22055	55 liter keg

## Well-Guard® Monitor Well Drilling Thread Compound



**Operating Ranges** -23°C to 204°C (-10°F to 400°F)

Specifically designed for use in critical monitor wells and other environmentally sensitive drilling applications, which require the use of a petroleum hydrocarbon free product. Provides maximum protection against galling, seizing and damage to threads, while maintaining monitor well integrity. WELL-GUARD is in full compliance with all Environmental Protection Agency (EPA) specifications limits. Well-Guard is petroleum hydrocarbon free and is biodegradable. **NOTE: not suitable for use with oxygen or strong oxidizers!**

SKU #	Size
18523	1-US gal pail



## Jet-Lube products listed alphabetically

12/34	Ezy-Open	Jet-Plex EP	<b>O</b>	<b>T</b>
202 Moly-Lith	Ezy-Pak 100	JetPump	OG-H	Temp-Guard
550	Ezy-Pak 115		Oven Chain Lubricant 	TF-15
769	Ezy-Pak 120	<b>K</b>		TF-500
<b>A</b>	Ezy-Pak 125	Kiln Grease	<b>P</b>	TFW
Alco EP	Ezy-Turn 2	Kollar King	Petro-Tape	Top Gun
Alco-EP ECF 	Ezy-Turn 3	Kopr-Kote	PFPE Grease	Tuff E Nuff
Alco-EP 73 Plus	Ezy-Turn 3 Arctic	Korr-Guard	Pitless Adapter Lube 	
AP-1 White	Ezy-Turn 4	Kovr-Kote	Plumber's Pal	<b>U</b>
AP-5	Ezy-Turn 5		Powr-Kote	Ultra
API-Modified Arctic	Ezy-Turn 6	<b>L</b>	PS Terminal	
API-Modified	Ezy-Turn 8	Lapping Oil		<b>V</b>
Arctic Grease	Ezy-Turn 12	LBX -Special	<b>R</b>	V-2
AX-2	Ezy-Turn 14	Lite Knight	RD-N	
	Ezy-Turn 22		RD-P	<b>W</b>
	Ezy-Turn Body Fill	<b>M</b>	Renew	Well-Guard 
<b>B</b>	Ezy-Turn H <sub>2</sub> S	Magic Wrench 	Riser Bolt Lube	White Knight 
Bullseye 	Ezy-Turn Polar	Marine Kopr	Rubber Lubricant/Mold Release	White Lithium
	Ezy-Turn PVS	Marine Moly	RuFF 9	Wire Line Lubricant ECF 
<b>C</b>		Marine MP	RuFF 21	WLD
CableLube	<b>F</b>	Marine Wire Rope & Hawser Grease	Run-N-Seal	WRL
CB-2	FMG 	Moly-Arc	Run-N-Seal ECF 	<b>Z</b>
CC-Lube 	Food Grade Silicone 	Moly-Mist	Rust Guard	Z-50
Clean-Up		Moly Petrolatum		Z-Plate Aerosol
Clean-Up Plus	<b>G</b>	Moly-Arc	<b>S</b>	Zinc Petrolatum
Creeper-Lube	Gear-Guard	MotherCutter 	Seal Guard	
	Graphite Petrolatum	MP-50	Seal-Guard ECF 	
<b>E</b>			Sheen Free 	
Easy-Clean	<b>J</b>	<b>N</b>	Silicone Compound DM	
Easy-Clean Liquid	J-75	NCS-30	Silicone Spray	
ECF Anti-Seize 	J-89	NCS-30 ECF 	Silver Plus	
Eco-Safe 	JL-5000 	Nikal	SS-30	
EMS 	Jacking System Grease ECF 	Nikal Nuclear		
Enviro-Guard 	Jet-Lok PS-50	No. 33		
Enviro-Safe	Jet-Lok PS-67	No. 60		
EP Bearing Grease	Jet-Lok TL-72	Nuclear Nonmetallic		
Extreme	Jet-Lube 21			



Qualifying products will bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)



Jet-Lube of Canada Ltd. was established in Edmonton, Alberta in 1954 to take advantage of the oil boom ushered in by Leduc oil discovery and to serve the surge of the new Oil Patch. The first products manufactured were primarily thread compounds designed for the drilling and production industries. By focusing on product quality and reliability, Jet-Lube soon became a dominant force in the niche industry of oilfield thread compounds.

In the mid 1970's the product line was diversified to include MRO (Maintenance, Repair, Overhaul) products such as anti-seize compounds, thread sealants, greases and lubricants, cleaners and degreasers, etc. – products that virtually every industry uses in some part of their operations. The same care and attention to quality has quickly brought us to the fore as a world leader in the manufacture of thread compounds and specialty lubricants. New products are constantly being developed to address new technology and environmental concerns.

Since the late 1980s, Jet-Lube has led the way in the development of environmentally-acceptable lubricants, sealants and related specialty products. After years of reformulation and testing, Jet-Lube now offers industries around the world a complete line of environmentally acceptable products that exceed industry standards and meet Jet-Lube's own high-performance criteria. Qualifying products bear our "Eco-Certified" thumbprint.

In 1995 Jet-Lube was one of the first manufacturing companies in Canada to receive the ISO 9000 series certification and in 2008 upgraded to the 9001:2008 standard.

Over the past decade warehouse facilities have been added across Canada to better serve our customers from coast to coast. While Jet-Lube of Canada Ltd. continues to be inspired by the potential for further growth, the prime commitment will always be to customer satisfaction.

We are always happy for the opportunity to talk to our customers and potential customers about our products and about specific applications. If we don't have a product on the shelf that will help, ask us about developing or modifying a product specifically for your application. Solving problems is what helps us grow!





## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

Vice President & General Manager  
Gary McCormick  
[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

National Sales & Marketing Manager:  
Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

Technical Service:  
Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

Inside Sales:  
Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.